



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 379 182 B1**

12

EUROPEAN PATENT SPECIFICATION

- 45 Date of publication of patent specification: **13.04.94** 51 Int. Cl.5: **H01L 41/08, F02M 41/14, F02D 41/40**
- 21 Application number: **90100946.4**
- 22 Date of filing: **17.01.90**

54 **Apparatus for driving piezoelectric element for closing and opening valve member.**

30 Priority: **18.01.89 JP 7668/89**

43 Date of publication of application:
25.07.90 Bulletin 90/30

45 Publication of the grant of the patent:
13.04.94 Bulletin 94/15

84 Designated Contracting States:
DE FR GB

56 References cited:
US-A- 4 644 212
US-A- 4 705 003

PATENT ABSTRACTS OF JAPAN, vol. 11, no. 191 (M-600), 19th June 1987 ; & JP-A-62 17 338 (TOYOTA MOTOR CORP.) 26-01-1987

73 Proprietor: **TOYOTA JIDOSHA KABUSHIKI KAISHA**
1, Toyota-cho
Toyota-shi
Aichi-ken(JP)

72 Inventor: **Mitsuyasu, Masaki c/o Toyota Jidosha K.K.**
1, Toyoda-cho, Toyoda-shi,
Aichi(JP)

74 Representative: **Pellmann, Hans-Bernd,**
Dipl.-Ing. et al
Patentanwaltsbüro
Tiedtke-Bühling-Kinne & Partner
Bavariaring 4
D-80336 München (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

1. Field of the Invention

The present invention relates to an apparatus for driving a piezoelectric element which is used as a fuel injection valve of a gasoline engine, a diesel engine, or the like.

2. Description of the Related Art

A high response characteristic piezoelectric element is applicable to an actuator of a fuel injection apparatus of a gasoline engine, a diesel engine, and the like (see: Unexamined Japanese Patent Publication (Kokai) Nos. 60-249877 and 62-17338). For example, in a fuel injection apparatus, a pressure chamber is linked to a controlled fuel passage, and a needle as a valve member is provided therebetween. Fuel is supplied from the controlled fuel passage, via a clearance of the needle, to the pressure chamber, and further, fuel is leaked from the pressure chamber, via the above-mentioned clearance, to the controlled fuel passage. In this fuel injection apparatus, a piezoelectric element is provided to expand and contract a volume of the pressure chamber, thereby closing and opening the needle. In the prior art, if this piezoelectric element is expanded and contracted by applying a positive voltage and a negative voltage thereto, respectively, a definite positive voltage is applied to the piezoelectric element to expand it, i.e., contract the volume of the pressure chamber, thereby closing the needle, and a definite negative voltage is applied to the piezoelectric element to contract it, i.e., expand the volume of the pressure chamber, thereby opening the needle. An apparatus for driving a piezoelectric element of such a pressure chamber is e.g. known from US-A-4 644 212.

In the above-mentioned prior art method for driving the piezoelectric element, however, if an opening state of the needle is very short, a large closing force cannot be generated at the needle, which may cause a secondary opening, such as a secondary injection, during a closing state, which will be later explained in more detail.

SUMMARY OF THE INVENTION

Therefore, an object of the present invention is to increase a closing force of the needle (valve member) during a closing state even when an opening time is short.

According to the present invention, in an apparatus for driving a piezoelectric element to close and open a valve member by expanding and contracting a volume of a pressure chamber, at an

initial stage of a closing state of the valve member a higher voltage than a conventional charging voltage or a lower voltage than a conventional discharging voltage is applied to the piezoelectric element, to thus create an initial large closing force in the valve member.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more clearly understood from the description as set forth below, with reference to the accompanying drawings, wherein:

Fig. 1 is a longitudinal cross-sectional view illustrating an example of a fuel injection apparatus where a piezoelectric element is used as an actuator;

Figs. 2A and 2B are diagrams schematically showing the operation of the apparatus of Fig. 1; Figs. 3A, 3B, 4A, and 4B are timing diagrams showing the operation of the apparatus of Fig. 1; Fig. 5 is a circuit diagram schematically illustrating a basic configuration of an apparatus for driving an piezoelectric element according to the present invention;

Figs. 6A and 6B are timing diagrams showing the operation of the circuit of Fig. 5;

Fig. 7 is a circuit diagram illustrating a first embodiment of the apparatus for driving a piezoelectric element according to the present invention;

Figs. 8A through 8D are timing diagrams showing the operation of the circuit of Fig. 7;

Figs. 9A, 9B, and 9C are diagrams showing the states of the fuel injection apparatus of Fig. 1 obtained by the operation of the circuit of Fig. 7; Fig. 10 is a circuit diagram showing a modification of Fig. 7;

Fig. 11 is a circuit diagram illustrating a second embodiment of the apparatus for driving a piezoelectric element according to the present invention; and,

Figs. 12A through 12D are timing diagrams showing the operation of the circuit of Fig. 11.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

First, a fuel injection apparatus according to the present invention, to which an apparatus for driving a piezoelectric element is applied, will be explained with reference to Fig. 1. That is, in Fig. 1, reference 101 indicates a nozzle body having an injection hole 102 in a pointed end thereof, and a needle (valve member) 103 is inserted into the nozzle body 101 to open and close the injection hole 102. The nozzle body 101 is fitted into a body 104, and fuel is supplied from a fuel inlet 105, a fuel pas-

sage 107 having a blind plug 106, a fuel passage 108, a fuel accumulating chamber 109, and a pressure accumulating chamber 110, to the injection hole 102. A tapered pressure susceptor 111 is formed in the needle 103, and when a fuel pressure is applied to the pressure susceptor 111, the needle 103 moves in the valve opening direction. The fuel accumulating chamber 109 is formed around the pressure susceptor 111. Formed between the upper portion of the needle 103 and the inner surface of the nozzle body 101 is a small clearance 112 through which fuel is supplied from the fuel accumulating chamber 109 to a pressure chamber 113 formed above the chamber 109. The pressure chamber 113 is located between a lower end of a piston 114 and an upper end of the body 104, and a fuel pressure within the pressure chamber 113 serves as a force for moving the needle 103 up and down. The piston 114 is slidably mounted within a case 115 and is pushed up by a dish spring 116. Provided within the case 115 is an electroexpansive actuator 118 having an extensive/contractive laminated piezoelectric element 117. Also, a distance piece 119 is provided below the pressure chamber 111 to define and hold an opening position of the needle 103. For this purpose, a smaller opening than the perpendicular direction area of the pressure susceptor face 111 is provided in the distance piece 119.

In the fuel injection apparatus of Fig. 1, fuel is supplied, via the fuel inlet 105 and the fuel passages 107 and 108, to the fuel accumulating chamber 109, and is further supplied, via the clearance 112, to the pressure chamber 113 and the pressure accumulating chamber 110 on the side of the injection hole 12.

A closing state and an opening state of the fuel injection apparatus of Fig. 1 will be explained with reference to Figs. 2A and 2B. Namely, when the piezoelectric element 117 is expanded, the pressure P_1 of the pressure chamber 113 is rapidly increased to force the needle 103 down, and as a result, the pressure P_1 of the pressure chamber 113 is reduced. As shown in Fig. 2A, in a closing state wherein the needle 103 closes the injection hole 102, a downward force received by the needle 103 is expressed as,

$$P_1 \times A_1$$

where A_1 is an upper area of the needle 103, and an upward force received by the needle 103 is expressed as,

$$P_2 \times A_2$$

where P_2 is a predetermined pressure of fuel, such as 200 kg/cm², at the fuel inlet 105 from the

fuel supply passage (not shown), and A_2 is an effective longitudinal area of the pressure susceptor 111. Therefore, since $A_1 > A_2$, then

$$P_1 \times A_1 > P_2 \times A_2,$$

even when $P_1 = P_2$, whereby a closing state of the needle 103 is maintained. On the other hand, when the piezoelectric element 117 is contracted, the pressure P_1 of the pressure chamber 113 is rapidly reduced to allow the needle 103 to move upward, and accordingly, the pressure P_1 of the pressure chamber 113 is increased. As shown in Fig. 2B, in an opening state of the needle 103, a downward force received by the needle 103 is expressed as,

$$P_2 \times A_1'$$

where A_1' is an area of an opening of the distance piece 119, and an upward force received by the needle 103 is expressed as,

$$P_1 \times A_2'$$

where A_2' is an lower effective longitudinal area of the needle 103 including the pressure susceptor 111, i.e., the upper effective area A_1 , of the needle 103. Therefore, since $A_1 < A_2 (=A_1')$,

$$P_1 \times A_1' > P_2 \times A_2'$$

even when $P_1 = P_2$, and thus an opening state of the needle 103 is maintained.

Accordingly, when the piezoelectric element 117 is contracted, the needle 103 is forced upward by the fuel pressure received by the pressure susceptor 111, whereby the needle 103 allows an injection of fuel from the injection hole 102. Conversely, when the piezoelectric element 117 is expanded, the pressure of the pressure chamber 113 is increased to force the needle 103 down, so that the needle 103 is closed to complete the injection.

Although the expansional contraction of the piezoelectric element 117 contributes to the descent/ascent of the needle 103, a closing force of the needle 103 is dependent upon the leakage amount from the pressure chamber 113 due to the expansion of the piezoelectric element 117, and an opening force of the needle 103 is dependent upon the fuel inflow amount to the pressure chamber 113 due to the contraction of the piezoelectric element 117. To carry out this leakage and inflow of fuel, flow, the volume V_1 of the pressure chamber 113, including a space of an upper portion of the needle 103 of Fig. 2A and the volume V_2 of the pressure chamber 113 of Fig. 2B satisfy:

$$V_1 < V_2.$$

For this purpose, the change of the volume of the pressure chamber 113 due to the expansion/contraction of the piezoelectric element 117 is made larger than that due to the ascent/descent of the needle 103.

In the prior art, to drive the fuel injection apparatus of Fig. 1, a voltage V_{PZT} as shown in Figs. 3A, 3B, 4A, 4B is applied to the piezoelectric element 117. Here it is assumed that the piezoelectric element 117 is expanded by applying a positive voltage thereto, and that the piezoelectric element 117 is contracted by applying a negative voltage thereto.

The point at which a closing time and an opening time are both sufficiently long is illustrated in Fig. 3A and 3B. Namely, when the voltage V_{PET} applied to the piezoelectric element 117 is +500 V, the piezoelectric element 117 is expanded as shown in Fig. 3A, so that the needle 103 is in a closing state. In this case, fuel in the pressure chamber 113 is leaked via the clearance 112 of the needle 103, and finally, at a time t_1 , the pressure P_1 of the pressure chamber 113 becomes equal to the pressure P_2 (200 kg/cm²) of the fuel accumulating chamber 109. At this time, the volume of the pressure chamber 113 is V_1 , as indicated in Fig. 2A. Next, at a time t_1 , when the voltage V_{PZT} applied to the piezoelectric element 117 is changed from +500 V to -200 V, the piezoelectric element 117 is contracted so that the pressure P_1 of the pressure chamber 113 is rapidly decreased. As a result, $P_1 < P_2$, and this difference $P_2 - P_1$ contributes to a propulsive force of the needle 103. Therefore, the needle 103 moves upward as shown in Fig. 2B. At this time, the pressure P_1 in the pressure chamber 113 rapidly approaches the rail pressure P_2 , but the upper position of the needle 103 is confined by the distance piece 119 so that P_1 is maintained immediately before the rail pressure P_2 . At this time, the volume of the pressure chamber 113 is still almost V_1 . Thereafter, fuel is allowed to flow via the clearance 112 to the pressure chamber 113, so that P_1 gradually approaches the rail pressure P_2 , and accordingly, the volume of the pressure chamber 113 is gradually changed from V_1 to V_2 . Finally, at a time t_2 , $P_1 = P_2$, and the volume of the pressure chamber 113 is V_2 . Namely, while fuel is supplied to the pressure chamber 113 and the volume thereof is changed from V_1 to V_2 , the pressure P_1 of the pressure chamber 113 is smaller than the rail pressure P_2 , thus creating a large opening force at the needle 103.

Next, at a time t_2 , when the voltage V_{PZT} applied to the piezoelectric element 117 is changed from -200 V to +500 V, the piezoelectric

element 117 is expanded so that the pressure P_1 of the pressure chamber 113 is rapidly increased. As a result $P_1 > P_2$, and this difference: $P_1 - P_2$ contributes to a propulsive force at the needle 103. Therefore, the needle 103 is moved down as shown in Fig. 2B. At this time, the pressure P_1 of the pressure chamber 113 rapidly approaches the rail pressure P_2 , but the lower position of the needle 103 is confined by the injection hole 102 so that P_1 is maintained immediately before the rail pressure P_2 . At this time, the volume of the pressure chamber 113 is still almost V_2 . Thereafter, fuel is allowed to flow via the clearance 112 from the pressure chamber 113, so that P_1 gradually approaches the rail pressure P_2 , and accordingly, the volume of the pressure chamber 113 is gradually changed from V_2 to V_1 . Finally, $P_1 = P_2$, and the volume of the pressure chamber 113 is V_1 . Namely, while fuel is leaked and the volume is changed from V_2 to V_1 , the pressure P_1 in the pressure chamber 113 is larger than the rail pressure P_2 thus creating a large closing force at the needle 103.

Therefore, when a closing time and an opening time are both sufficiently large, the inflow of fuel to the pressure chamber 113 and the leakage of fuel from the pressure chamber 113 are as required, thus obtaining a large needle closing force and a large needle opening force.

In a fuel injection, however, an opening time (injection time) is much smaller than a closing time, and in this case, the driving state is as illustrated in Figs. 4A and 4B. Namely, during a long closing time, fuel at the pressure chamber 113 is completely leaked via the clearance 112 of the needle 103, and at an end timing t_1 of this closing time $P_1 = P_2$. Contrary to this, during a short opening time, a predetermined rail pressure P_2 is always operated at the fuel inlet 105, and the inflow of fuel via the clearance 112 to the pressure chamber 113 is not sufficient. Therefore, even at an end timing t_2 of an opening time, P_1 (chamber) $< P_2$. In an extreme case, the volume of the pressure chamber 113 is close to V_1 . Therefore, at a time t_2 , when the applied voltage V_{PZT} is changed from -200 V to +500 V, a propulsive force is generated at the needle 103, but since the volume of the pressure chamber 113 immediately after the needle 103 moves down is almost V_1 , the P_1 of the pressure chamber 113 immediately after the descent of the needle 103 is almost P_2 . Namely, even when a large voltage is applied to the piezoelectric element 117 to close the needle 103, the fuel inflow amount is small during a short opening time. Therefore, after the needle 103 is closed, the leakage of fuel is almost zero, and thus the P_1 of the pressure chamber 113 is returned immediately to rail pressure P_2 .

Therefore, when a piezoelectric element is applied to a fuel injection apparatus having a short opening time, a large needle closing force can not be obtained, and accordingly, the needle 117 is forced upward due to a pressure wave by a water pulsive operation after the closing of the needle 103, thereby inviting a secondary injection.

In Fig. 5, which illustrates a basic configuration for driving the piezoelectric element according to the present invention, a charging switching means B receives a DC output of a high DC voltage generating means A, to apply a high DC voltage to the piezoelectric element 117, and a discharging switching mean C discharges the piezoelectric element 117. In Fig. 5, a voltage gradually-decreasing means D or a voltage gradually-increasing means E is provided. If the piezoelectric element 117 is charged, so that a closing force is generated at the needle 103, the voltage gradually-decreasing means D is provided. In this case, the discharging switching means A charges the piezoelectric element 117 by a high voltage of the high voltage generating means A to apply a predetermined voltage such as 600 V to the piezoelectric element 117. The voltage gradually-decreasing means D applies the initial voltage 600 V to the piezoelectric element 117, and thereafter, gradually decreases this voltage from 600 V to a predetermined voltage such as 500 V.

The discharging switching means C discharges charges of the piezoelectric element 117.

Next, if the piezoelectric element 117 is discharged, so that a closing force is generated at the needle 103, the voltage gradually-increasing means E is provided. That is, the discharging switching means C discharges charges of piezoelectric element to make a voltage of the piezoelectric element 117 a first predetermined voltage such as -300 V. The voltage gradually-increasing means E applies the initial voltage -300 V to the piezoelectric element 117, and thereafter, gradually increases this voltage from -300 V to a predetermined voltage such as -200 V.

The operation of the apparatus of Fig. 5 provided with the voltage gradually-decreasing means D is shown in Fig. 6A, and the operation of the apparatus of Fig. 5 provided with the voltage gradually-increasing means E is shown in Fig. 6B.

In both cases, an opening time is very short.

At an end timing of a closing time, as shown in Fig. 6A, it is assumed that the piezoelectric element 117 has an expansion corresponding to 500 V, and the volume of the pressure chamber 113 is V_1 as indicated in Fig. 10(A). An opening valve time is short, and therefore, the inlet of fuel is almost zero. At an end time of the opening time, even when 500 V is applied to the piezoelectric element 117, the volume of the pressure chamber

113 is almost V_1 and P_1 (chamber) is almost the rail pressure P_2 , but as illustrated in Fig. 6A, a higher charging voltage +600 V is applied to the piezoelectric element 117 at an initial stage of the closing time, so that the amount of expansion of the piezoelectric element 117 in the closing direction of the needle 103 is larger than the amount of contraction of the piezoelectric element 117 in the opening direction of the needle 103. As a result, a larger closing force is generated at the needle 103. A secondary opening occurs simultaneously when the needle 103 is closed, and such a larger closing force becomes unnecessary after the closing of the needle 103. Therefore, the applied voltage V_{PZT} is gradually changed from +600 V to +500 V. During a relatively long closing time, the needle 103 is remains in a closing state, due to the construction thereof, even when $P_1 = P_2$.

Similarly, in Fig. 6B, a larger discharging voltage -300 V is applied to the piezoelectric element 117 at an initial stage of the closing time, so that the amount of expansion of the piezoelectric element 117 in the closing direction of the needle 103 is larger than the amount of contraction of the piezoelectric element 117 in the opening direction of the needle 103. As a result, a larger closing force is generated at the needle 103.

At an initial stage of a closing time, even when a larger voltage (+600 V) or a smaller voltage (-300 V) is applied to the piezoelectric element 117, there is little leakage of fuel from the pressure chamber 113. For this purpose, when the above-mentioned voltage +600 or -300 is returned immediately to +500 or -200 V, P_1 of the pressure chamber 113 becomes lower than the rail pressure P_2 , to make it difficult to maintain a closing state per se. For this purpose, a gradual change of the voltage is carried out by the voltage gradually-decreasing means D or the voltage gradually-increasing means E. In Fig. 7, which illustrates a first embodiment of the driving apparatus of a piezoelectric element according to the present invention, it is assumed that, when the piezoelectric element 117 is charged, the element 117 is expanded to carry out a closing operation. Reference 1 designates a 12 V battery which supplies power via an ignition switch 2 to a high DC voltage generating circuit 3. This high DC voltage generating circuit 3 converts the battery voltage 12 V into a voltage of 300 V or the like, and applies it to a condenser 4.

The high DC voltage generating circuit 3 is formed by a high frequency oscillation circuit 31, a step-up transformer 32 as a step-up circuit, a transistor 33 for turning ON and OFF the primary coil of the step-up transformer 32, and a diode 34 for supplying a positive voltage generated in the secondary coil of the step-up transformer 3a to a condenser 4.

Also, a thyristor 51 and a coil 52 are provided as a charging switching circuit 5, and a thyristor 61 and a coil 62 are provided as a discharging circuit 6. The thyristor 51 is turned ON by a closing ignition signal (pulse) S_1 , and the thyristor 61 is turned ON by an opening ignition signal (pulse) S_2 .

The coil 52 is used for forming an LC oscillation circuit. Therefore, when the thyristor 51 is turned ON, an LC oscillation circuit is formed by the condenser 4, the coil 52, and the piezoelectric element 117, thereby enhancing the reduction of the voltage of the condenser 4 and the increase of the voltage of the piezoelectric element 117. Thereafter, the thyristor 51 is turned OFF by natural commutation. As a result, the charged voltage of the piezoelectric element 117 is higher than the voltage 300 V of the condenser 4; for example, is 600 V.

The coil 62 is also used for forming an LC oscillation circuit. Therefore, when the thyristor 61 is turned ON, an LC oscillation circuit is formed by the coil 62 and the piezoelectric element 5, thereby enhancing the reduction of the voltage of the piezoelectric element 117. Thereafter, the thyristor 61 is turned OFF by natural commutation. As a result, the discharged voltage of the piezoelectric element 117 becomes lower than the earth voltage (0V), for example, is -200 V.

Reference 7 designates a voltage gradually-decreasing circuit which includes a Zener diode 71, a reverse current avoiding diode 72, and a resistor 73 for delaying a current flowing through the Zener diode 71.

The operation of the circuit of Fig. 7 will be explained with reference to Figs. 8A through 8D, and Figs. 9A, 9B, and 9C.

In the high DC frequency generating circuit 3, the transistor 33 is turned ON and OFF by the pulse signal of the high frequency oscillation circuit 31, a primary current flows through the primary coil of the step-up transformer 32 when the transistor 33 is turned ON, and accordingly, magnetic flux energy is accumulated in the core of the transformer. Next when the transistor 33 is changed from an ON state to an OFF state, the above-mentioned accumulated magnetic flux energy appears as a generated voltage, such as 300 V, in the secondary coil of the step-up transformer 32 in accordance with Faraday's law. When the pulse duration of the pulse signal of the high frequency oscillation circuit 31 is definite, this generated voltage is definite. This generated voltage is accumulated via the diode 34 in the condenser 4, and after a certain time has passed, the voltage of the condenser 4 becomes equal to the generated voltage 300 V of the secondary coil of the step-up transformer 32. At this time, the amount Q of charges accumulated at the condenser 4 (capacitance C) is

tance C) is

$$Q = C \times 300 \text{ V.}$$

At this time, or at a subsequent predetermined timing, the CPU (not shown) generates a closing signal S_1 and the thyristor 51 is turned ON, whereby an LC oscillation circuit is formed by the condenser 4, the coil 52, and the piezoelectric element 117. Therefore, charges accumulated in the condenser 4 are moved to the piezoelectric element 117, to charge same. In this case, due to the presence of the above-mentioned LC oscillation circuit, the terminal voltage V_{PZT} of the piezoelectric element 117 becomes higher than the final voltage of the condenser 4, as shown in Fig. 8C and becomes, for example, 600 V, and thereafter the thyristor 51 is turned ON by natural commutation.

When the terminal voltage V_{PZT} of the piezoelectric element 117 is 600 V so that fuel is completely leaked, the state of the fuel injection apparatus of Fig. 1 is illustrated in Fig. 9A, and the volume V_0 of the pressure chamber 113 is smaller than the volume V_1 of Fig. 2A. Namely, if there is no leakage of fuel during an opening time, the volume V_1 of the pressure chamber 113 in a closing state of Fig. 9B is about the same as the volume V_2 of the pressure chamber 113 in an opening state of Fig. 9C, i.e.,

$$V_1 \approx V_2$$

Therefore, at a closing initial stage, the volume of the pressure chamber 113 is about the same as the volume V_1 at an end timing of an closing stage, but the volume V will become equal to V_1 , thus creating a large closing force. That is, the difference between the applied voltage +500 V at an end timing of a closing state and the applied voltage +600 V at an initial stage of an closing state, generates a large closing force at the needle 103.

As explained above, charges accumulated in the piezoelectric element 117 are gradually discharged by the voltage gradually-decreasing circuit 7. Namely, the terminal voltage V_{PZT} of the piezoelectric element 117 is gradually reduced from +600 V to +500 V, depending upon a time constant determined by the circuit 7 and the piezoelectric element 117, and thereafter, this voltage becomes stable. Therefore, when the terminal voltage V_{PZT} is +500 V, $P_1 = P_2$. Also, since the volume V of the pressure chamber 113 is almost V_1 , a subsequent application of +600 V can again generate a large closing force.

When the terminal voltage V_{PZT} of the piezoelectric element 117 becomes 500 V, the fuel injection apparatus of Fig. 1 becomes in a state as

shown in Fig. 9B (Fig. 2A), i.e., $P_1 = P_2$, but the closing force of the needle 103 is maintained as explained above.

In the above-mentioned state, after a predetermined time has passed, when the CPU generates opening ignition signal S_2 , the thyristor 61 is turned ON, so that an LC oscillation circuit is formed by the piezoelectric element 117 and the coil 62, and thus charges accumulated in the piezoelectric element 117 are discharged. In this case, due to the presence of the above-mentioned LC oscillation circuit, the terminal voltage V_{PZT} of the piezoelectric element 117 becomes lower than 0 V, for example, becomes -200 V, and thereafter the thyristor 61 is turned ON by natural commutation.

As a result, the injection apparatus of Fig. 1 becomes in a state as shown in Fig. 9C (which is the same, as Fig. 2B).

Namely, the displacement of the piezoelectric element 117 is L at a final stage of a closing state, compared with an opening state, and at an initial stage of a closing state, this displacement will become $L + \Delta L$, which increases the closing force at the needle 103.

Thus, by the circuit of Fig. 7, since the volume of the pressure chamber 117 will be increased at an initial stage of a charging state, the closing force at the needle 103 is increased. Note that only the voltage gradually-decreasing circuit 7 is added, and the signals S_1 and S_2 for controlling the circuit of Fig. 7 are generated in the same manner as in the prior art driving apparatus not provided with the circuit 7.

Figure 10 shows a modification of Fig. 3, in which the voltage gradually-decreasing circuit 7 is modified. That is, in Fig. 10, a voltage gradually-decreasing circuit 7' is connected between a positive-potential-side terminal of the condenser 4 and a positive-potential side terminal of the piezoelectric element 117, and thus the discharging energy of the terminal voltage V_{PZT} of the piezoelectric element 117 from +600 V to +500 V is regenerated at the condenser 4 as a DC high power supply source. This is advantageous from the point of a consumption of power, compared with the circuit of Fig. 7.

In Fig. 11, which illustrates a second embodiment of the driving apparatus of a piezoelectric element according to the present invention, it is assumed that, when the piezoelectric element 117 is discharged, the element 117 is expanded to carry out a valve closing operation, as in Japanese Utility Model Publication No. 63-24362. Namely, instead of the voltage gradually-decreasing circuit 7 of Fig. 7, there is provided a voltage gradually-increasing circuit 8 which includes a Zener diode 81, a reverse current avoiding diode 82, and a

resistor 83 for delaying a current flowing through the Zener diode 81, and the closing pulse S_1 is applied to the thyristor 61, and the opening pulse S_2 is applied to the thyristor 51.

In Fig. 11, when the thyristor 51 of the changing circuit 5 is turned ON, an LC oscillation circuit is formed by the condenser 4, the piezoelectric element 117, and the coil 52, thereby increasing the voltage V_{PZT} of the piezoelectric element 117 at +500 V, and when the thyristor 61 is turned ON, an LC oscillation circuit is formed by the piezoelectric element 117 and the coil 62, to reduce the voltage V_{PZT} of the piezoelectric element 117 at -300 V. Further, the Zener voltage of the Zener diode 81 of the voltage charging circuit 8 is 200 V.

The operation of the circuit of Fig. 11 will be explained with reference to Figs. 12A through 12D.

Where the terminal voltage V_{PZT} of the piezoelectric element 117 is 500 V, when the CPU generates a closing ignition signal S_1 , the thyristor 61 is turned ON, an LC oscillation circuit is formed by the piezoelectric element 117 and the coil 62, and thus charges accumulated in the piezoelectric element 117 are discharged. In this case, as shown in Fig. 12C, due to the presence of the above-mentioned LC oscillation circuit, the terminal voltage V_{PZT} of the piezoelectric element 117 becomes lower than 0 V, for example, becomes -300 V, and thereafter, the thyristor 61 is turned ON by natural commutation. When the terminal voltage V_{PZT} of the piezoelectric element 5 is -300 V so that fuel is completely leaked, the state of the fuel injection apparatus of Fig. 1 is illustrated in Fig. 9A, and the volume V_0 of the pressure chamber 113 is smaller than the volume V_1 of Fig. 2A. That is, if there is no leakage of fuel, during an opening time, the volume V_1 of the pressure chamber 113 in a closing state of Fig. 9B is about the same as the volume V_2 of the pressure chamber 113 in an opening state of Fig. 9C, i.e.,

$$V_1 \approx V_2$$

Therefore, at a closing initial stage, the volume of the pressure chamber 113 is about the same as the volume V_1 at an end timing of a closing stage, but the volume V is going will become equal to V_1 (Fig. 9A), thus creating a large closing force at the needle 103. That is the difference between applied voltage -300 V at an end timing of a closing state and the applied voltage -200 V at an initial state of a closing state generates a large closing force at the needle 103.

As explained above, negative charges accumulated in the piezoelectric element 117 are gradually discharged by the voltage gradually-increasing circuit 8. Namely, the terminal voltage V_{PZT} of the piezoelectric element 117 is gradually

increased from -300 V to -200 V depending upon a time constant determined by the circuit 8 and the piezoelectric element 117, and thereafter, this voltage becomes stable. Therefore, when the terminal voltage V_{PZT} is -200 V, $P_1 \approx P_2$. Also, since the volume V of the pressure chamber 113 is almost V_1 , a next application of -300 V can again generate a large closing force.

When the terminal voltage V_{PZT} of the piezoelectric element 117 becomes -200 V, the injection apparatus of Fig. 1 becomes in a state as shown in Fig. 9B, i.e., $P_1 = P_2$, but the closing force at the needle 103 is maintained as explained above,

In the above-mentioned state, after a predetermined time has passed, the CPU generates an opening signal S_2 , the thyristor 51 is turned ON, and thus an LC oscillation circuit is formed by the condenser 4, the coil 52, and the piezoelectric element 117, charge the piezoelectric element. In this case, due to the presence of the above-mentioned LC oscillation circuit, the terminal voltage V_{PZT} of the piezoelectric element 117 becomes higher than 300 V, as shown in Fig. 12D, and becomes, for example, 300 V, and thereafter, the thyristor 51 is turned ON by natural commutation.

As a result, the injection valve becomes in a state as shown in Fig. 9C (which is the same as Fig. 2B).

Therefore, in the same way as in the first embodiment, the displacement of the piezoelectric element 117 is L at a final stage of a closing state (compared with an opening state), and at an initial stage of a closing state, this displacement will become $L + \Delta L$, which increases the closing force at the needle 103. Note that only the voltage gradually-increasing circuit 8 is added, and the signals S_1 and S_2 for controlling the circuit of Fig. 11 are generated in the same manner as in the prior art driving apparatus not provided with the circuit 8.

As explained above, according to the present invention, the closing force at the needle (valve member) can be increased at an initial stage of a closing state, thereby avoiding the ascent of the valve member due to pressure wave by a water pulsive operation or the like, and avoiding a secondary injection when the present invention is applied to a fuel injection apparatus.

Claims

1. An apparatus for driving a piezoelectric element (117) to expand and contract a volume of a pressure chamber (113) which is linked via a clearance (112) of a valve member (103) to a controlled liquid passage (109), to thereby close and open said valve member, comprising:

a high DC voltage generating means (1, 2, 3, 4);

a charging switching means (5), connected to said high DC voltage generating means and said piezoelectric element, for charging said piezoelectric element by a high voltage of said high DC voltage generating means to apply a first predetermined voltage to said piezoelectric element, to thereby close said valve member;

a voltage gradually-decreasing means (7, 7'), connected to said piezoelectric element, for gradually decreasing a voltage of said piezoelectric element from said first predetermined voltage to a second predetermined voltage lower than said first predetermined voltage; and

a discharging switching means (6), connected to said piezoelectric element, for discharging charges accumulated in said piezoelectric element, to thereby open said valve member.

2. An apparatus as set forth in claim 1, wherein a voltage decreasing operation of said voltage gradually-decreasing means is carried out within an initial stage of a closing state of said valve member and is complete before an opening state thereof.

3. An apparatus as set forth in claim 1, wherein said voltage gradually-decreasing means comprises:

a constant voltage means (71, 71') which is turned ON when the voltage of said piezoelectric element is higher than said second predetermined voltage; and

a delay means (73, 73'), connected to said constant voltage means, for delaying a current flowing through said constant voltage means.

4. An apparatus as set forth in claim 1, wherein said voltage gradually-decreasing means is connected to said high DC voltage generating means, thereby regenerating charges accumulated in said piezoelectric element in said high DC voltage generating means.

5. An apparatus as set forth in claim 3, wherein said constant voltage means comprises a Zener diode.

6. An apparatus as set forth in claim 3, wherein said delay means comprises a resistor.

7. An apparatus as set forth in claim 1, wherein said high DC voltage generating means comprises:

- a battery (1);
 a DC/DC converter (3), connected to said battery, for generating a DC output; and
 a condenser (4), connected to said DC/DC converter, for accumulating the DC output thereof. 5
8. An apparatus as set forth in claim 7, wherein said charging switching means comprises:
 a charging thyristor (51) and a coil (52) 10
 connected in series between said condenser and said piezoelectric element,
 an LC oscillation circuit being formed by said condenser, said coil, and said piezoelectric element, to charge said piezoelectric element, to thereby generate said first predetermined voltage, when said charging thyristor is turned ON by a closing signal (S₁). 15
9. An apparatus as set forth in claim 1, wherein said discharging switching means comprises:
 a discharging thyristor (61) and a coil (62) 20
 connected in series and connected in parallel with said piezoelectric element,
 an LC oscillation circuit being formed by said coil and said piezoelectric element, to discharge the charges accumulated therein when said discharging thyristor is turned ON by an opening signal (S₂). 25
10. An apparatus for driving a piezoelectric element (117) to expand and contract a volume of a pressure chamber (113) which is linked via a clearance (112) of a valve member (103) to a controlled liquid passage (109), to thereby close and open said valve member, comprising:
 a high DC voltage generating means (1, 2, 3, 4); 30
 a charging switching means (5), connected to said high DC voltage generating means and said piezoelectric element, for charging said piezoelectric element by a high voltage of said high DC voltage generating means, to thereby open said valve member; 40
 a discharging switching means (6), connected to said piezoelectric element, for discharging charges accumulated in said piezoelectric element to apply a first predetermined voltage to said piezoelectric element, to thereby close said valve member; and 45
 a voltage gradually-increasing means (8), connected to said piezoelectric element, for gradually increasing a voltage of said piezoelectric element from said first predetermined voltage to a second predetermined voltage higher than said first predetermined voltage. 50 55
11. An apparatus as set forth in claim 10, wherein a voltage increasing operation of said voltage gradually-increasing means is carried out within an initial stage of a closing state of said valve member and is complete before an opening state thereof.
12. An apparatus as set forth in claim 10, wherein said voltage gradually-increasing means comprises:
 a constant voltage means (81) which is turned ON when the voltage of said piezoelectric element is lower than said second predetermined voltage; and
 a delay means (83), connected to said constant voltage means, for delaying a current flowing through said constant voltage means.
13. An apparatus as set forth in claim 12, wherein said constant voltage means comprises a Zener diode.
14. An apparatus as set forth in claim 12, wherein said delay means comprises a resistor.
15. An apparatus as set forth in claim 12, wherein said high DC voltage generating means comprises:
 a battery (1);
 a DC/DC converter (3), connected to said battery, for generating a DC output; and
 a condenser (4), connected to said DC/DC converter, for accumulating the DC output thereof.
16. An apparatus as set forth in claim 15, wherein said charging switching means comprises:
 a charging thyristor (51) and a coil (52) connected in series between said condenser and said piezoelectric element,
 an LC oscillation circuit being formed by said condenser, said coil, and said piezoelectric element, to charge said piezoelectric element, when said charging thyristor is turned ON by an opening signal (S₂).
17. An apparatus as set forth in claim 10, wherein said discharging switching means comprises:
 a discharging thyristor (61) and a coil (62) connected in series and connected in parallel with said piezoelectric element,
 an LC oscillation circuit being formed by said coil and said piezoelectric element, to discharge the charges accumulated therein, to thereby apply said first predetermined voltage to said piezoelectric element, when said discharging thyristor is turned ON by a closing signal (S₁).

Patentansprüche

1. Einrichtung zur Ansteuerung eines piezoelektrischen Elements (117) zum Vergrößern und Verkleinern des Volumens einer über einen lichten Abstand (112) eines Ventilglieds (103) mit einem gesteuerten Flüssigkeitsdurchlaß (109) verbundenen Druckkammer (113) zum Öffnen und Schließen des Ventilglieds, mit:
 - einer Gleich-Hochspannungs-Erzeugungseinrichtung (1, 2, 3, 4);
 - einer mit der Gleich-Hochspannungs-Erzeugungseinrichtung und dem piezoelektrischen Element verbundenen Lade-Schalt-Einrichtung (5) zum Laden des piezoelektrischen Elements durch eine Hochspannung der Hochspannungs-Erzeugungseinrichtung, und Anlegen einer ersten vorbestimmten Spannung an das piezoelektrische Element zum Schließen des Ventilglieds;
 - einer mit dem piezoelektrischen Element verbundenen, eine Spannung allmählich vermin- dernden Einrichtung (7, 7') zur allmählichen Verringerung der Spannung des piezoelektrischen Elements von der ersten vorbestimmten Spannung auf eine zweite vorbestimmte Spannung, die niedriger als die erste Spannung ist; und
 - einer mit dem piezoelektrischen Element verbundenen Entlade-Schalt-Einrichtung (6), zur Entladung der im piezoelektrischen Element akkumulierten Ladungen zum Öffnen des Ventilglieds.
2. Einrichtung nach Anspruch 1, bei der die spannungsverringende Funktion der eine Spannung allmählich vermin- dernden Einrichtung während eines Anfangsstadiums eines Schließzustands des Ventilglieds ausgeführt und vor einem Öffnungszustand abgeschlossen wird.
3. Einrichtung nach Anspruch 1, bei der die eine Spannung allmählich vermin- dernde Einrichtung umfaßt;
 - eine Konstantspannungseinrichtung (71, 71'), die EIN geschaltet wird, wenn die Spannung des piezoelektrischen Elements höher ist als die zweite vorbestimmte Spannung; und
 - eine mit der Konstantspannungseinrichtung verbundene Verzögerungseinrichtung (73, 73') zum Verzögern des durch die Konstantspannungseinrichtung fließenden Stroms.
4. Einrichtung nach Anspruch 1, bei der die eine Spannung allmählich vermin- dernde Einrichtung mit der Gleich-Hochspannungs-Erzeugungseinrichtung verbunden ist, wodurch die im piezoelektrischen Element akkumulierten Ladungen in der Gleich-Hochspannungs-Erzeugungseinrichtung zurückgewonnen werden.
5. Einrichtung nach Anspruch 3, bei der die Konstantspannungseinrichtung eine Zener-Diode aufweist.
6. Einrichtung nach Anspruch 3, bei der die Verzögerungseinrichtung einen Widerstand aufweist.
7. Einrichtung nach Anspruch 1, bei der die Gleich-Hochspannungs-Erzeugungseinrichtung umfaßt:
 - eine Batterie (1);
 - einen an die Batterie angeschlossenen Gleichspannungswandler (3) zum Erzeugen einer Ausgangs-Gleichspannung, und
 - einen an den Gleichspannungswandler angeschlossenen Kondensator (4) zum Akkumulieren dieser Ausgangs-Gleichspannung.
8. Einrichtung nach Anspruch 7, bei der die Lade-Schalt-Einrichtung umfaßt:
 - eine zwischen den Kondensator und das piezoelektrische Element geschaltete Serienschaltung eines Lade-Thyristors (51) und einer Spule (52),
 - einen durch den Kondensator, die Spule und das piezoelektrische Element gebildeten LC-Schwingkreis zum Laden des piezoelektrischen Elements und Erzeugen der ersten vorbestimmten Spannung, wenn der Lade-Thyristor durch ein schließendes Signal (S₁) durchgeschaltet wird.
9. Einrichtung nach Anspruch 1, bei der die Entlade-Schalt-Einrichtung umfaßt:
 - eine dem piezoelektrischen Element parallel geschaltete Serienschaltung eines Entlade-Thyristors (61) und einer Spule (62),
 - einen durch die Spule und das piezoelektrische Element gebildeten LC-Schwingkreis, zum Entladen der im piezoelektrischen Element akkumulierten Ladungen, wenn der Entlade-Thyristor durch ein öffnendes Signal (S₂) durchgeschaltet wird.
10. Einrichtung zur Ansteuerung eines piezoelektrischen Elements (117) zum Vergrößern und Verkleinern des Volumens einer über einen lichten Abstand (112) eines Ventilglieds (103) mit einem gesteuerten Flüssigkeitsdurchlaß (109) verbundenen Druckkammer (113) zum Öffnen und Schließen des Ventilglieds, mit:
 - einer Gleich-Hochspannungs-Erzeugungseinrichtung (1, 2, 3, 4);
 - einer mit der Gleich-Hochspannungs-Erzeugungseinrichtung und

- dem piezoelektrischen Element verbundenen Lade-Schalt-Einrichtung (5), zum Laden des piezoelektrischen Elements durch eine Hochspannung der Hochspannungs-Erzeugungseinrichtung und Öffnen des Ventilglieds; 5
- einer mit dem piezoelektrischen Element verbundenen Entlade-Schalt-Einrichtung (6), zur Entladung von im piezoelektrischen Element akkumulierten Ladungen und Anlegen einer ersten vorbestimmten Spannung an das piezoelektrische Element zum Schließen des Ventilglieds; und 10
- einer mit dem piezoelektrischen Element verbundenen, eine Spannung allmählich erhöhenden Einrichtung (8) zum allmählichen Erhöhen der Spannung des piezoelektrischen Elements von der ersten vorbestimmten Spannung auf eine zweite vorbestimmte Spannung, die höher als die erste Spannung ist. 15
11. Einrichtung nach Anspruch 10, bei der die spannungserhöhende Funktion der eine Spannung allmählich erhöhenden Einrichtung während eines Anfangsstadiums eines Schließzustands des Ventilglieds ausgeführt wird, und vor dem Öffnungszustand abgeschlossen wird. 20
12. Einrichtung nach Anspruch 10, bei der die eine Spannung allmählich erhöhende Einrichtung umfaßt: 25
- eine Konstantspannungseinrichtung (81), die EIN geschaltet wird, wenn die Spannung des piezoelektrischen Elements niedriger ist als die zweite vorbestimmte Spannung; und
- eine mit der Konstantspannungseinrichtung verbundene Verzögerungseinrichtung (83) zum Verzögern des durch die Konstantspannungseinrichtung fließenden Stroms. 30
13. Einrichtung nach Anspruch 12, bei der die Konstantspannungseinrichtung eine Zener-Diode aufweist. 35
14. Einrichtung nach Anspruch 12, bei der die Verzögerungseinrichtung einen Widerstand aufweist. 40
15. Einrichtung nach Anspruch 12, bei der die Gleich-Hochspannungs-Erzeugungseinrichtung umfaßt: 45
- eine Batterie (1);
- einen an die Batterie angeschlossenen Gleichspannungswandler (3) zum Erzeugen einer Ausgangs-Gleichspannung, und
- einen an den Gleichspannungswandler angeschlossenen Kondensator (4) zum Akkumulieren dieser Ausgangs-Gleichspannung. 50
- 55

16. Einrichtung nach Anspruch 15, bei der die Lade-Schalt-Einrichtung umfaßt: 5
- eine zwischen den Kondensator und das piezoelektrische Element geschaltete Serienschaltung eines Lade-Thyristors (51) und einer Spule (52),
- einen durch den Kondensator, die Spule und das piezoelektrische Element gebildeten LC-Schwingkreis zum Laden des piezoelektrischen Elements, wenn der Lade-Thyristor durch ein öffnendes Signal (S_2) durchgeschaltet wird.
17. Einrichtung nach Anspruch 10, bei der die Entlade-Schalt-Einrichtung umfaßt: 10
- eine dem piezoelektrischen Element parallel geschaltete Serienschaltung eines Entlade-Thyristors (61) und einer Spule (62),
- einen durch die Spule und das piezoelektrische Element gebildeten LC-Schwingkreis, zum Entladen des piezoelektrischen Elements und Anlegen der ersten vorbestimmten Spannung an das piezoelektrische Element, wenn der Entlade-Thyristor durch ein schließendes Signal (S_1) durchgeschaltet wird. 15

Revendications

1. Dispositif pour commander un élément piézoélectrique (117) pour dilater et contracter le volume d'une chambre de pression (113) qui est reliée via un espace libre (112) d'un élément de soupape (103) à un passage de liquide contrôlé, pour fermer et ouvrir ainsi cet élément de soupape, comprenant: 20
- des moyens (1, 2, 3, 4) de génération de haute tension en courant continu;
 - un moyen de commutation de charge (5) connecté à ces moyens de génération de haute tension en courant continu et à cet élément piézoélectrique, pour la charge de cet élément piézoélectrique par une haute tension provenant de ces moyens de génération de haute tension en courant continu pour appliquer une première tension prédéterminée à cet élément piézoélectrique, pour fermer ainsi cet élément de soupape;
 - un moyen (7, 7') diminuant progressivement la tension, connecté à cet élément piézoélectrique, pour diminuer progressivement la tension de cet élément piézoélectrique depuis cette première tension prédéterminée jusqu'à une seconde tension prédéterminée inférieure à cette première tension prédéterminée; et
 - un moyen de commutation de décharge (6) connecté à cet élément piézoélectrique, pour décharger des charges ac-

cumulées dans cet élément piézoélectrique, pour ouvrir ainsi cet élément de soupape.

2. Dispositif suivant la revendication 1, dans lequel une opération de diminution de la tension par ce moyen diminuant progressivement la tension est conduite au cours d'un stade initial d'une phase de fermeture de cet élément de soupape et est terminée avant une phase d'ouverture de celui-ci. 5 10
3. Dispositif suivant la revendication 1, dans lequel ce moyen diminuant progressivement la tension comprend: 15
 - des moyens de maintien d'une tension constante (71, 71') qui sont mis en fonction lorsque la tension de cet élément piézoélectrique est supérieure à cette seconde tension prédéterminée, et 20
 - des moyens de retard (73, 73') connectés à ces moyens de maintien de tension constante, pour retarder le passage d'un courant à travers ce moyen de maintien de tension constante. 25
4. Dispositif suivant la revendication 1, dans lequel ce moyen diminuant progressivement la tension est connecté à ce moyen de génération de haute tension en courant continu, de façon à régénérer des charges accumulées dans cet élément piézoélectrique par ces moyens de génération de haute tension en courant continu. 30 35
5. Dispositif suivant la revendication 3, dans lequel ce moyen de maintien de tension constante comprend une diode Zener.
6. Dispositif suivant la revendication 3, dans lequel ces moyens de retard comprennent une résistance. 40
7. Dispositif suivant la revendication 1, dans lequel ces moyens de génération de haute tension en courant continu comprennent: 45
 - un accumulateur (1);
 - un convertisseur DC/DC (3) raccordé à cet accumulateur, pour générer une sortie en courant continu; et 50
 - un condensateur (4), connecté à ce convertisseur DC/DC pour accumuler la sortie en courant continu de celui-ci.
8. Dispositif suivant la revendication 7, dans lequel ce moyen de commutation de charge comprend: 55

- un thyristor de charge (51) et une bobine (52) connectés en série entre ce condensateur et cet élément piézoélectrique;
- un circuit d'oscillation LC étant formé par ce condensateur, cette bobine et cet élément piézoélectrique pour charger cet élément piézoélectrique et pour générer ainsi cette première tension prédéterminée, lorsque ce thyristor de charge est mis en fonction par un signal de fermeture (S₁).

9. Dispositif suivant la revendication 1, dans lequel ce moyen de commutation de décharge comprend:
 - un thyristor de décharge (61) et une bobine (62) connectés en série et connectés en parallèle avec cet élément piézoélectrique;
 - un circuit d'oscillation LC étant formé par cette bobine et cet élément piézoélectrique pour décharger les charges qui y sont accumulées lorsque ce thyristor de décharge est mis en fonction par un signal d'ouverture (S₂).
10. Dispositif pour commander un élément piézoélectrique (117) pour dilater et contracter le volume d'une chambre de pression (113) qui est reliée via un espace libre (112) d'un élément de soupape (103) à un passage de liquide contrôlé (109), pour fermer et ouvrir ainsi cet élément de soupape, comprenant:
 - des moyens (1, 2, 3, 4) de génération de haute tension en courant continu;
 - un moyen de commutation de charge (5) connecté à ce moyen de génération de haute tension en courant continu et à cet élément piézoélectrique, pour la charge de cet élément piézoélectrique par une haute tension provenant de ces moyens de génération de haute tension en courant continu, pour ouvrir ainsi cet élément de soupape;
 - un moyen de commutation de décharge (6) connecté à cet élément piézoélectrique, pour décharger des charges accumulées dans cet élément piézoélectrique pour appliquer une première tension prédéterminée à cet élément piézoélectrique afin de fermer ainsi cet élément de soupape; et
 - un moyen (8) augmentant progressivement la tension connecté à cet élément piézoélectrique pour augmenter progressivement la tension de cet élément piézoélectrique depuis cette première tension prédéterminée jusqu'à une seconde

tension prédéterminé supérieure à cette première tension prédéterminée.

11. Dispositif suivant la revendication 10, dans lequel une opération d'augmentation de tension par ce moyen augmentant progressivement la tension est conduite au cours d'un stade initial d'une phase de fermeture de cet élément de soupape et est terminée avant une phase d'ouverture de celui-ci 5 10
12. Dispositif suivant la revendication 10, dans lequel ce moyen augmentant progressivement la tension comprend:
- un moyen de maintien de tension constante (81) qui est mis en fonction lorsque la tension de cet élément piézoélectrique est inférieure à celle de cette seconde tension prédéterminée, et 15
 - un moyen de retard (83) connecté à ce moyen de maintien de tension constante, pour retarder le passage du courant à travers ce moyen de maintien de tension constante. 20
13. Dispositif suivant la revendication 12, dans lequel ce moyen de maintien de tension constante comprend une diode Zener. 25
14. Dispositif suivant la revendication 12, dans lequel ce moyen de retard comprend une résistance. 30
15. Dispositif suivant la revendication 12, dans lequel ce moyen de génération de haute tension en courant continu comprend: 35
- un accumulateur (1);
 - un convertisseur DC/DC (3) raccordé à cet accumulateur, pour générer une sortie en courant continu; et 40
 - un condensateur (4), connecté à ce convertisseur DC/DC pour accumuler la sortie en courant continu de celui-ci.
16. Dispositif suivant la revendication 15, dans lequel ce moyen de commutation de charge comprend: 45
- un thyristor de charge (51) et une bobine (52) connectés en série entre ce condensateur et cet élément piézoélectrique; 50
 - un circuit d'oscillation LC étant formé par ce condensateur, cette bobine, et cet élément piézoélectrique, pour charger cet élément piézoélectrique, lorsque ce thyristor de charge est mis en fonction par un signal d'ouverture (S₂). 55

17. Dispositif suivant la revendication 10, dans lequel ce moyen de commutation de décharge comprend:

- un thyristor de décharge (61) et une bobine (62) connectés en série et connectés en parallèle avec cet élément piézoélectrique;
- un circuit d'oscillation LC étant formé par cette bobine et cet élément piézoélectrique pour décharger les charges qui y sont accumulées de façon à appliquer cette première tension prédéterminée à cet élément piézoélectrique, lorsque ce thyristor de décharge est mis en fonction par un signal de fermeture (S₁).

Fig. 1

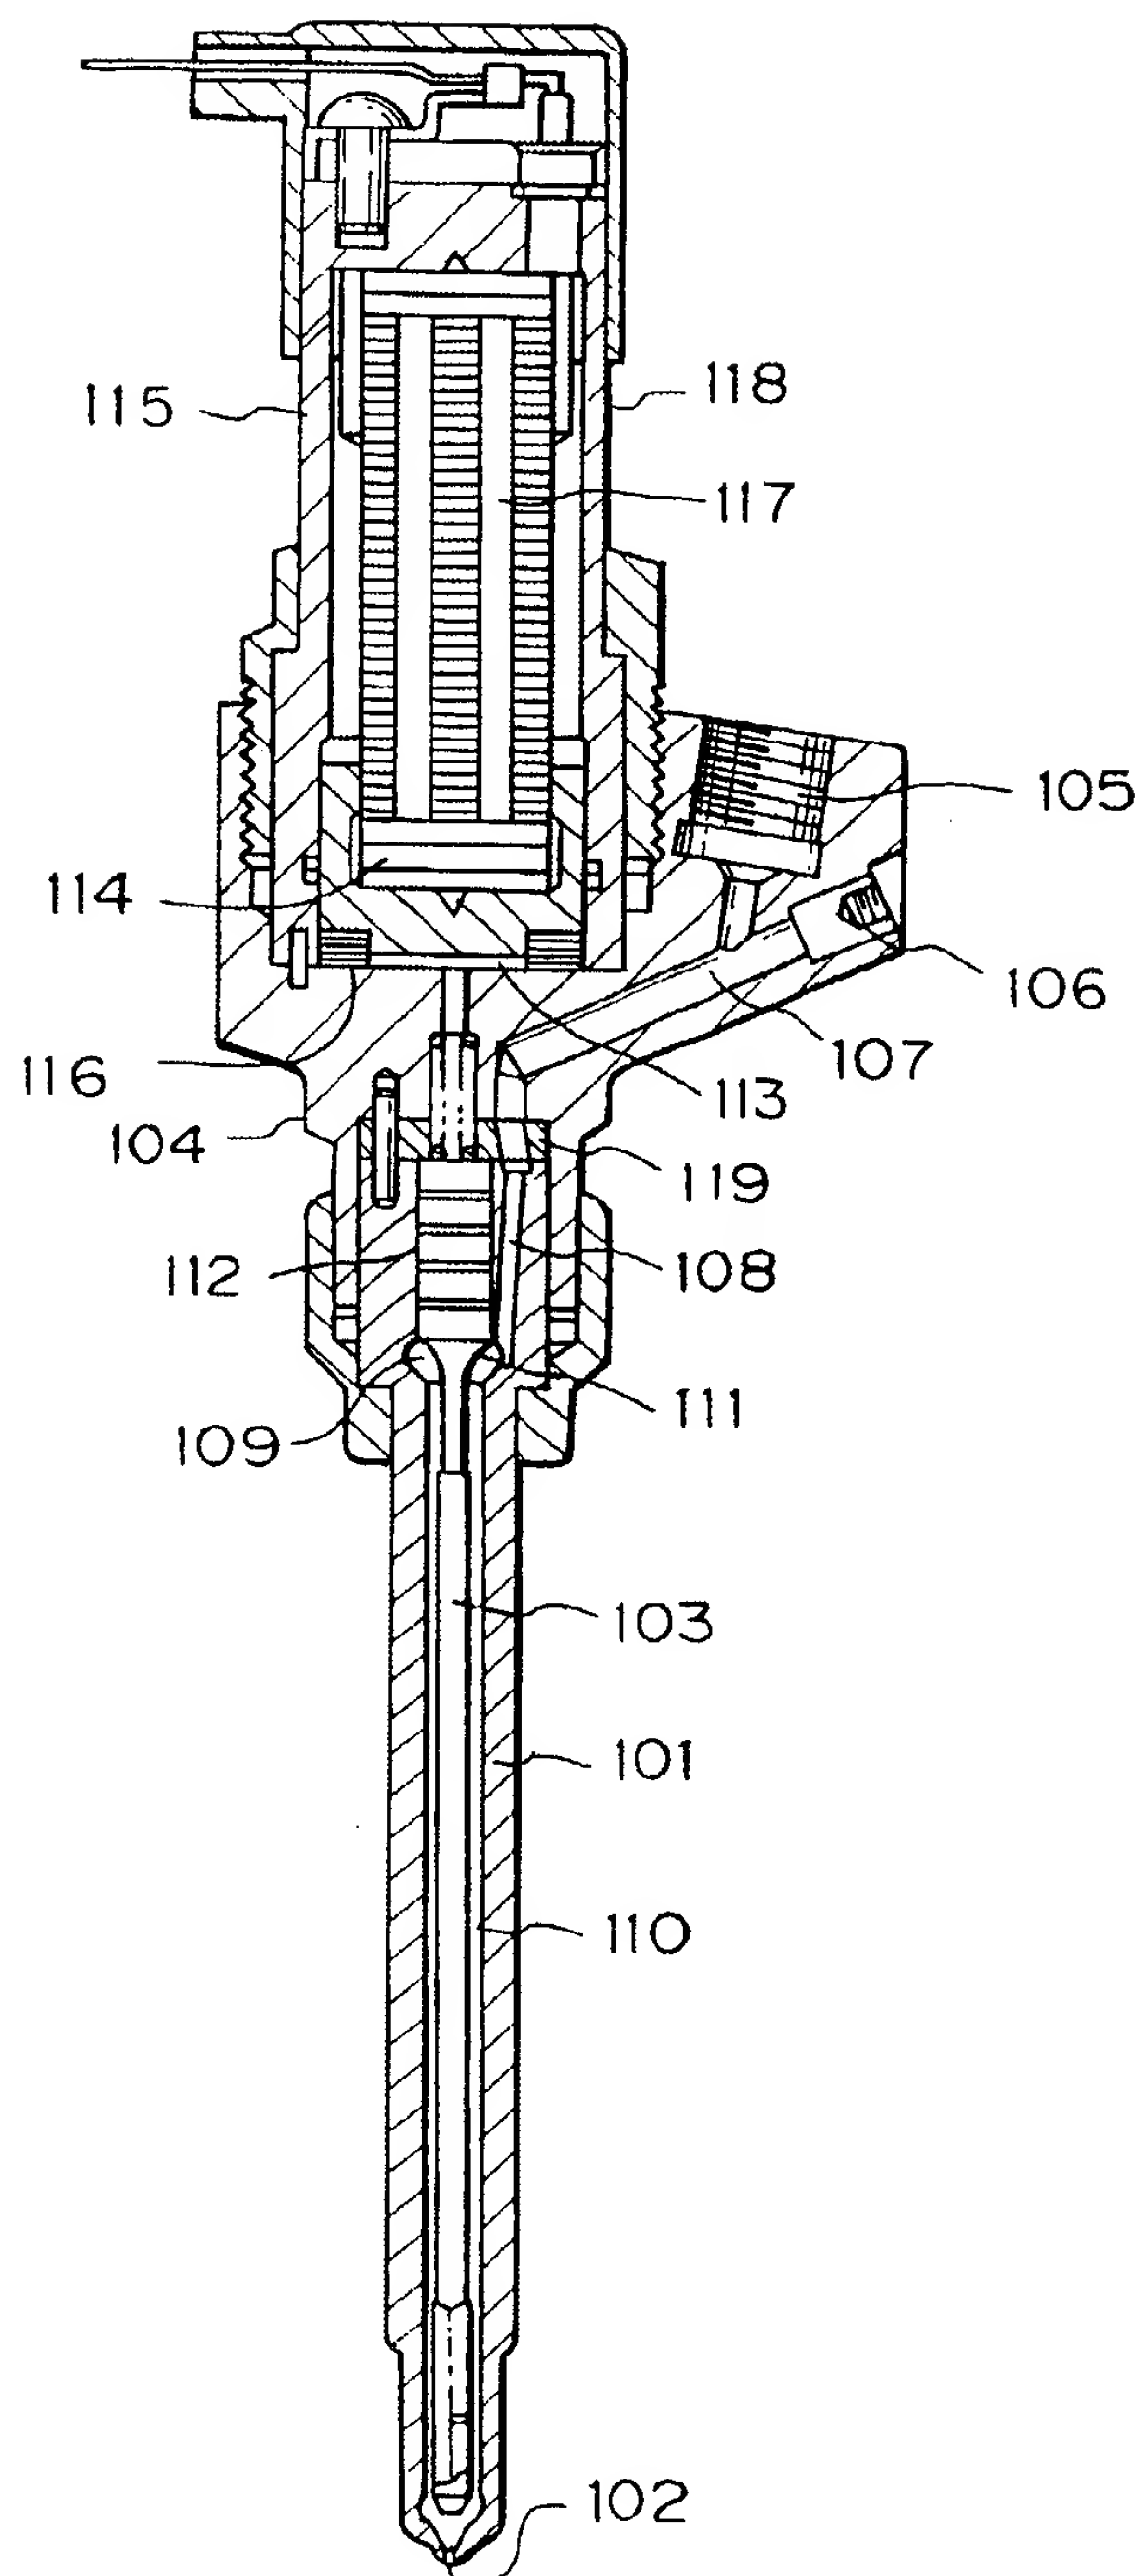
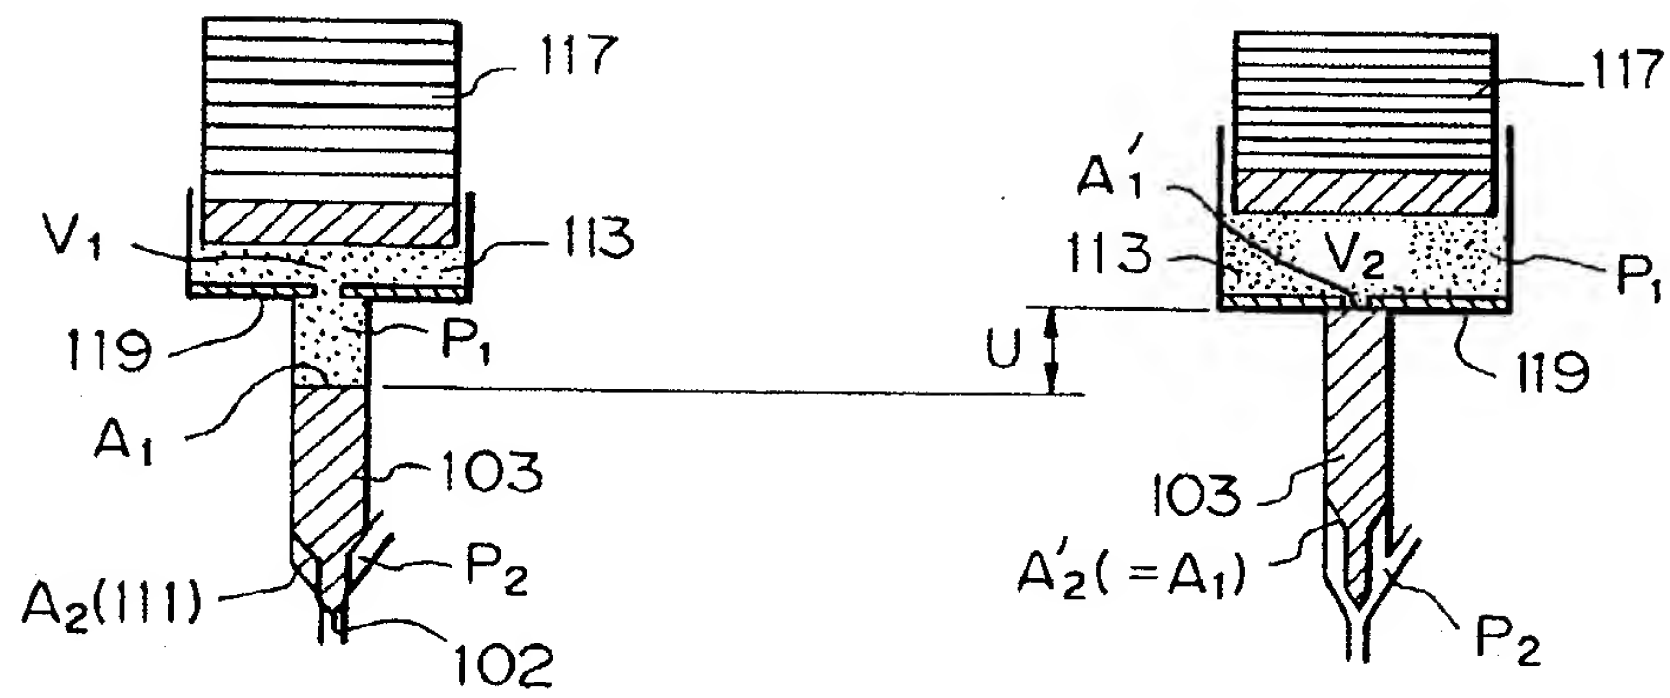


Fig. 2A

Fig. 2B



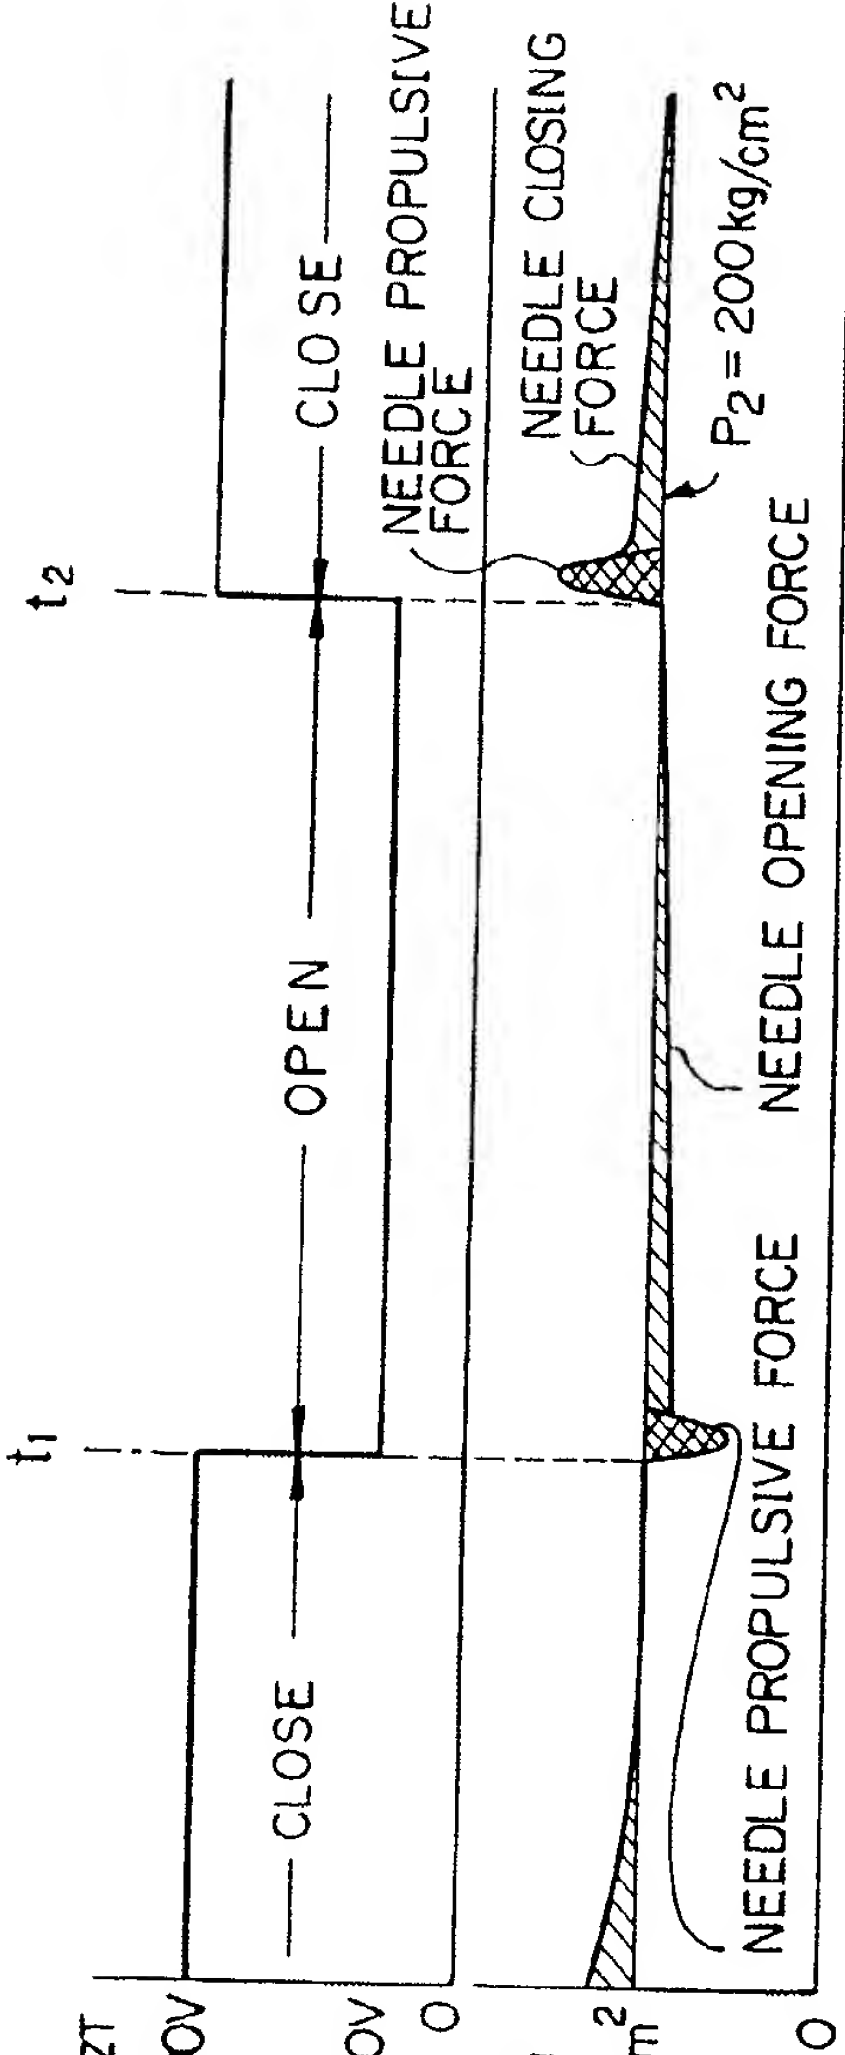


Fig. 3A

Fig. 3B

Fig. 4A

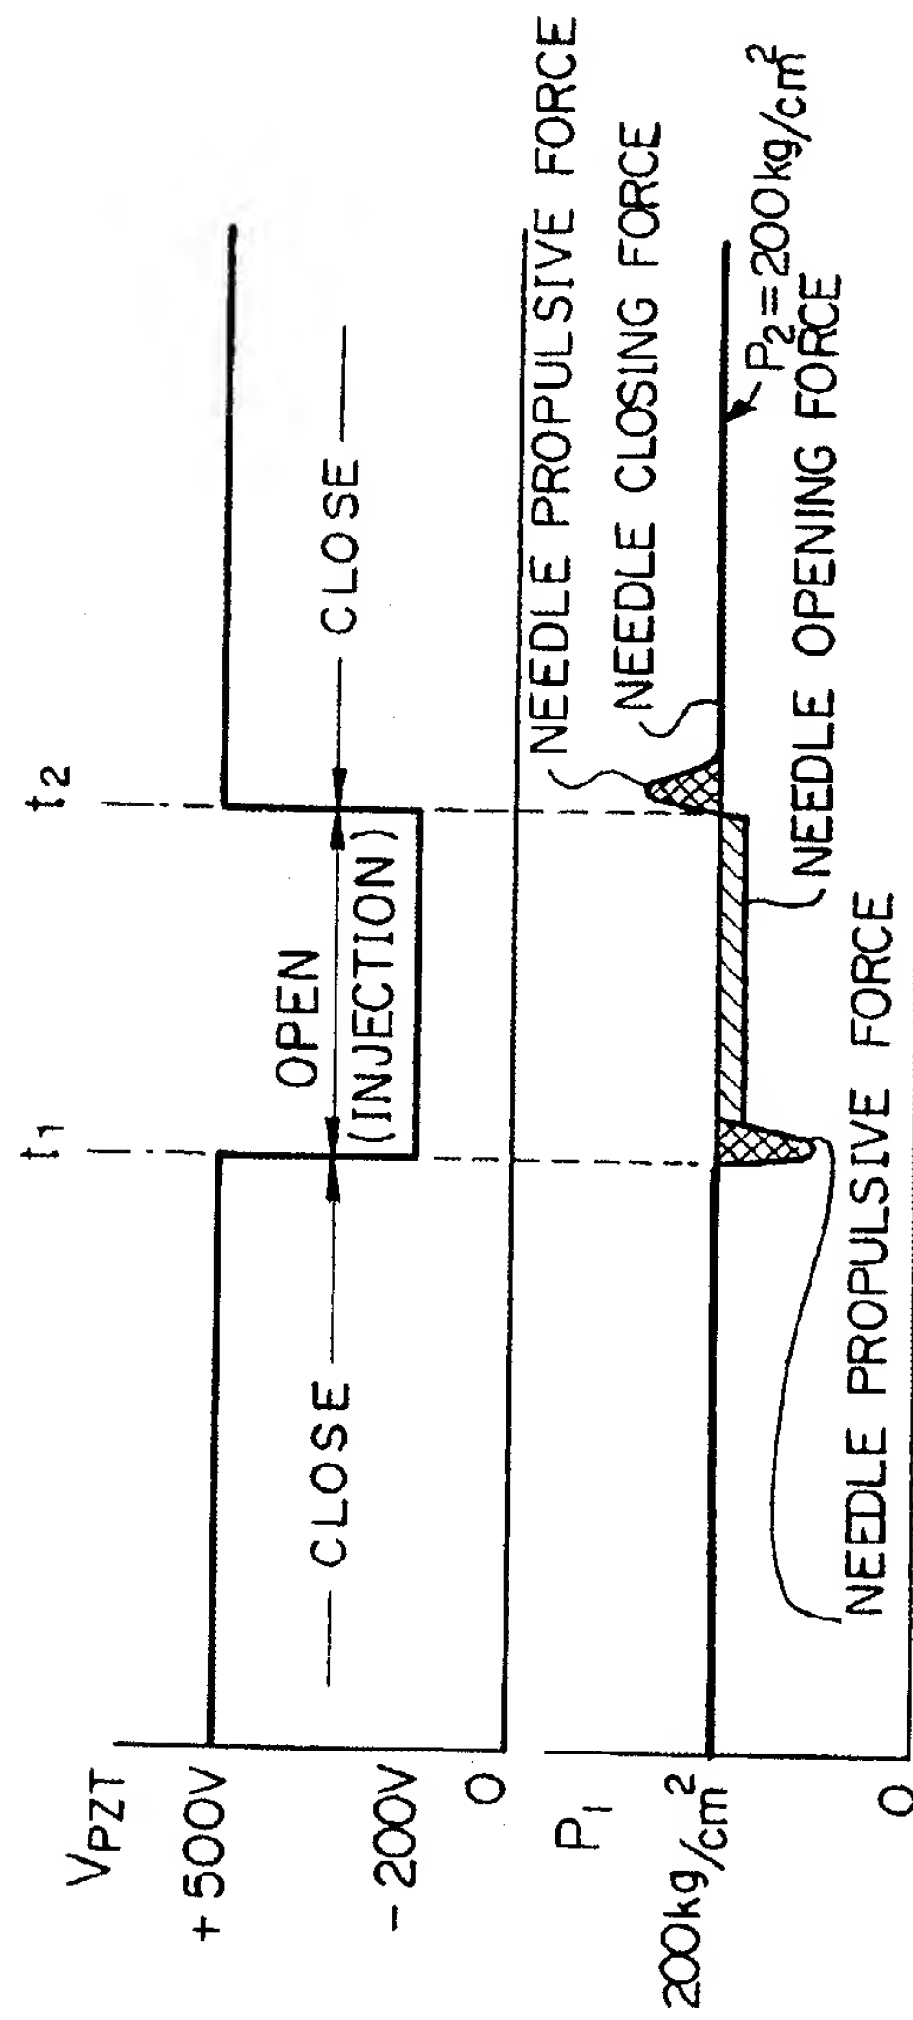
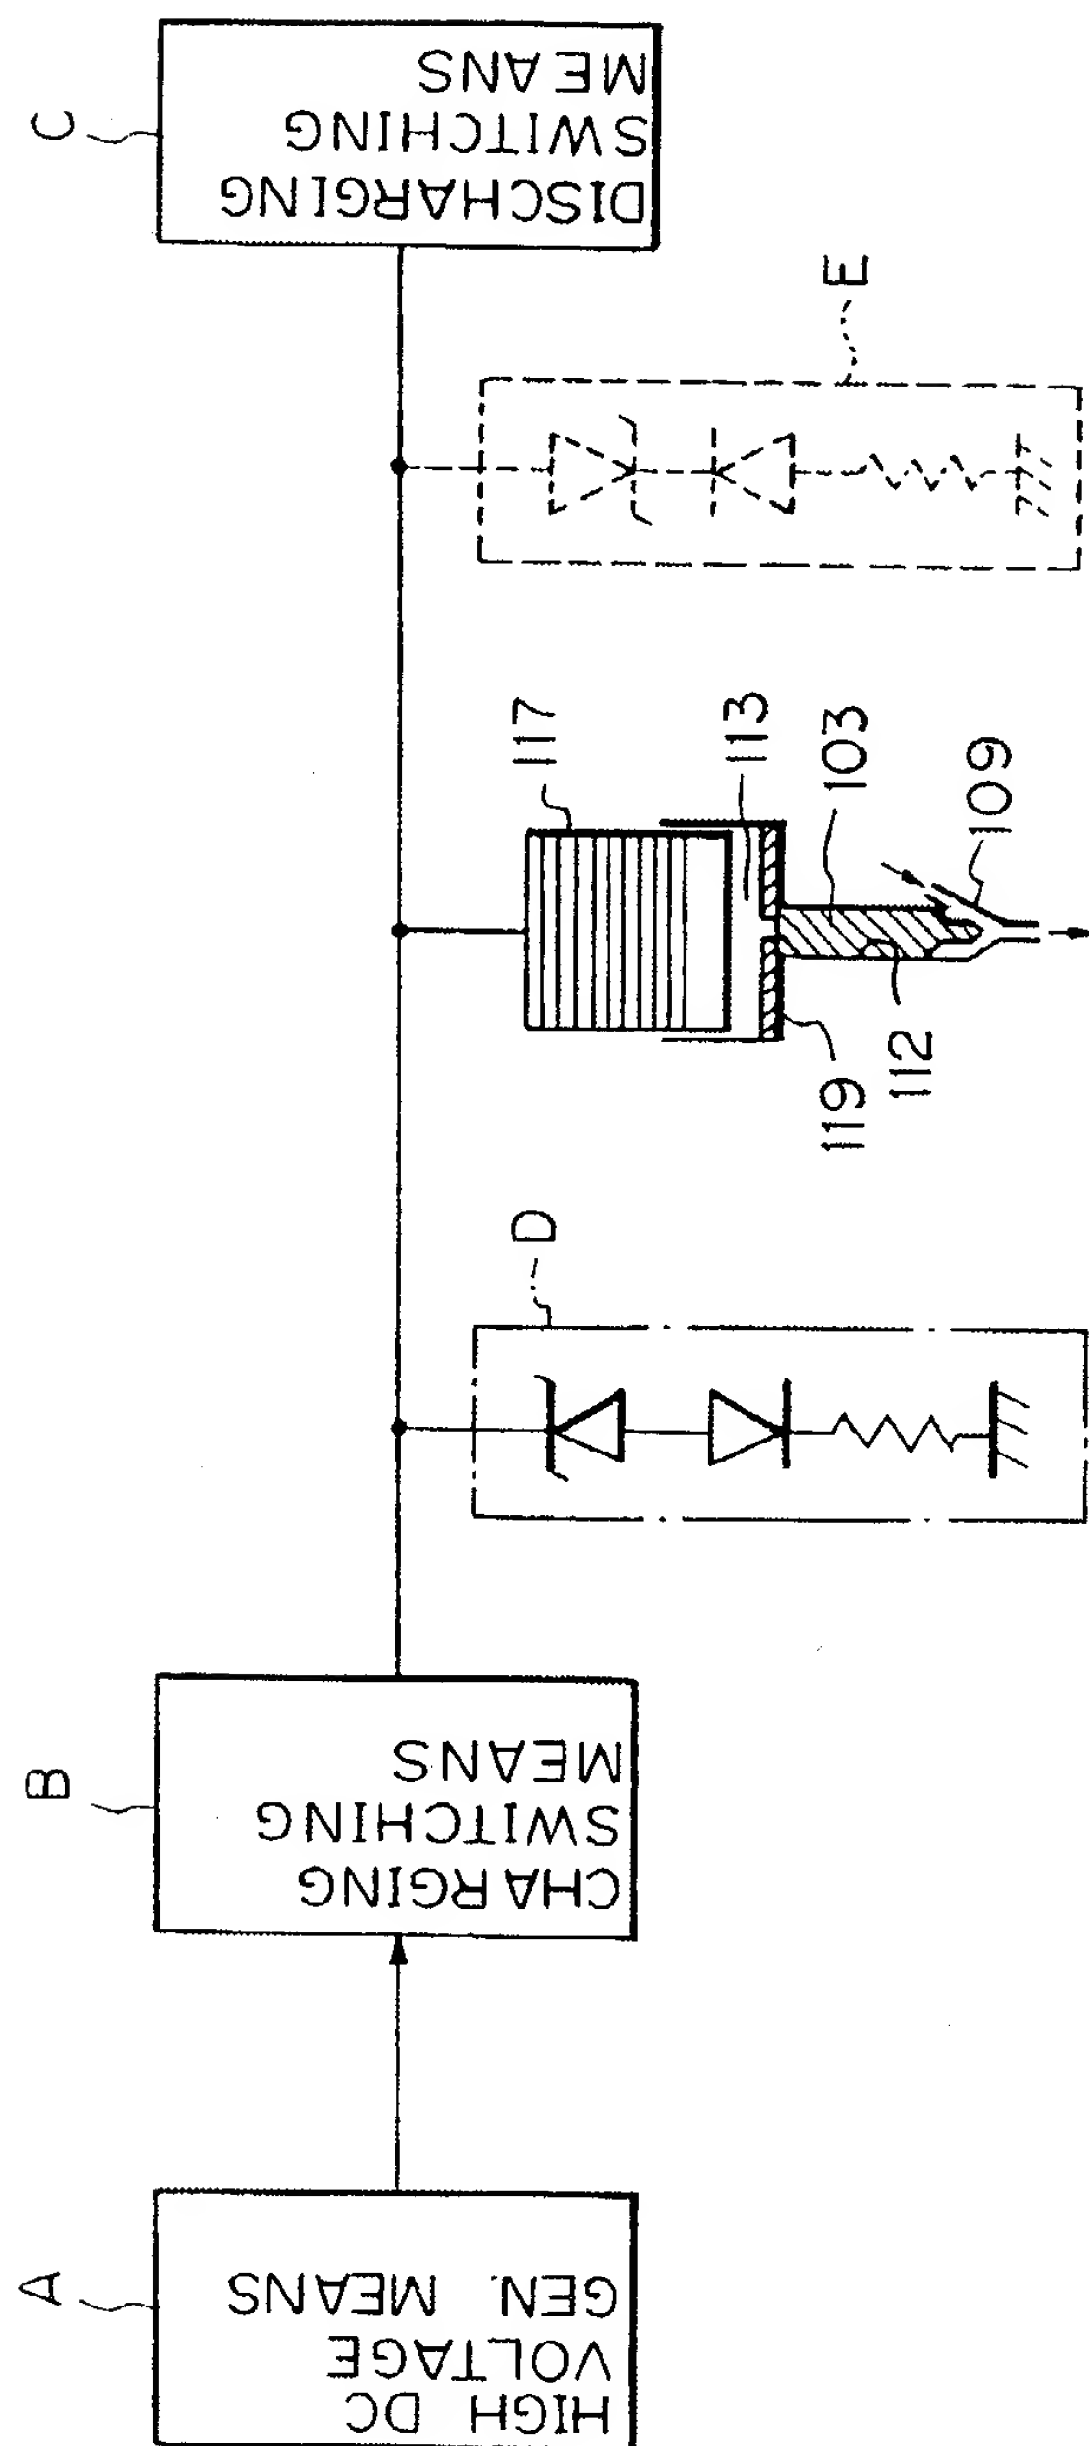


Fig. 4B

Fig. 5



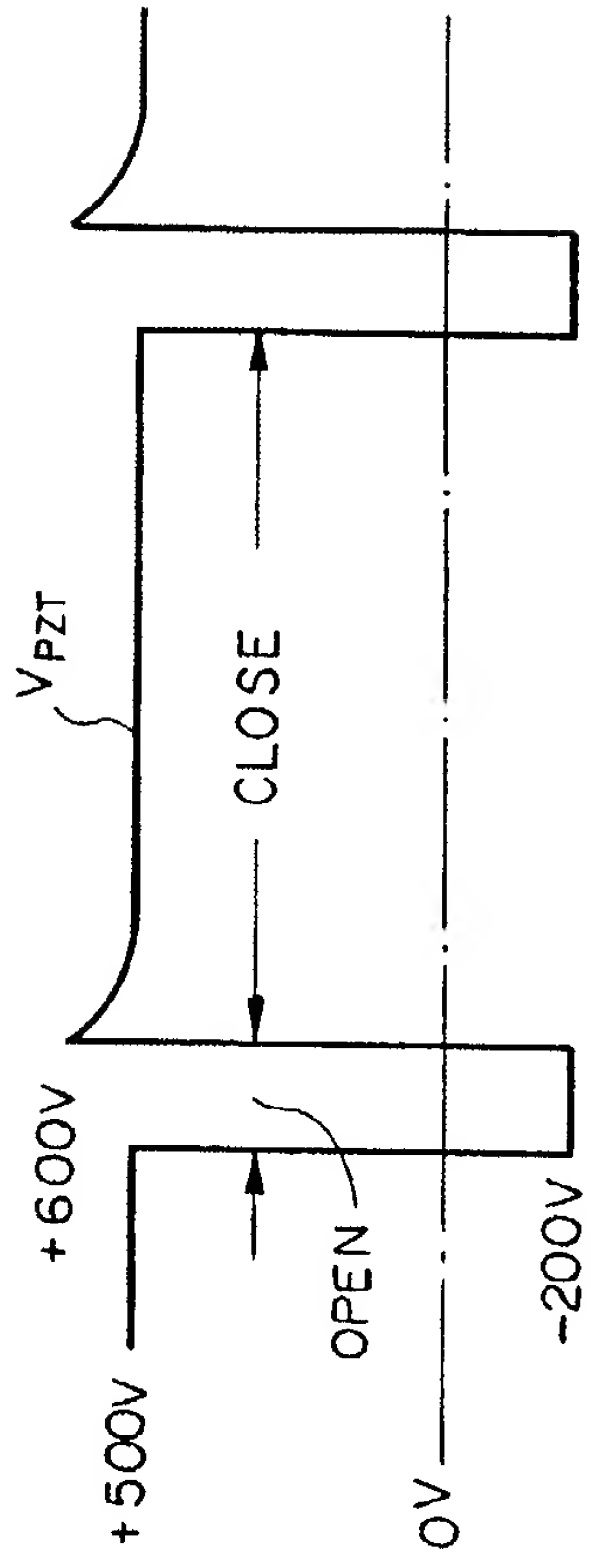


Fig. 6A

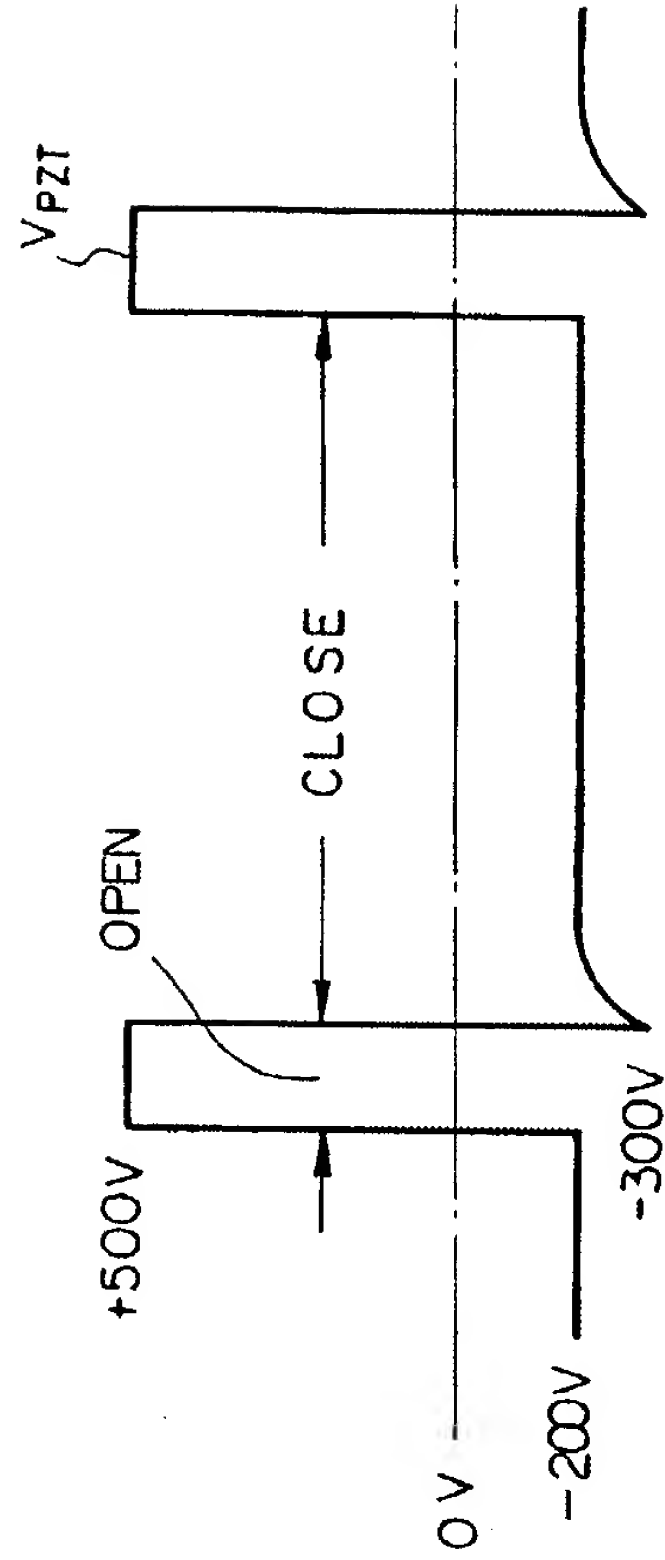
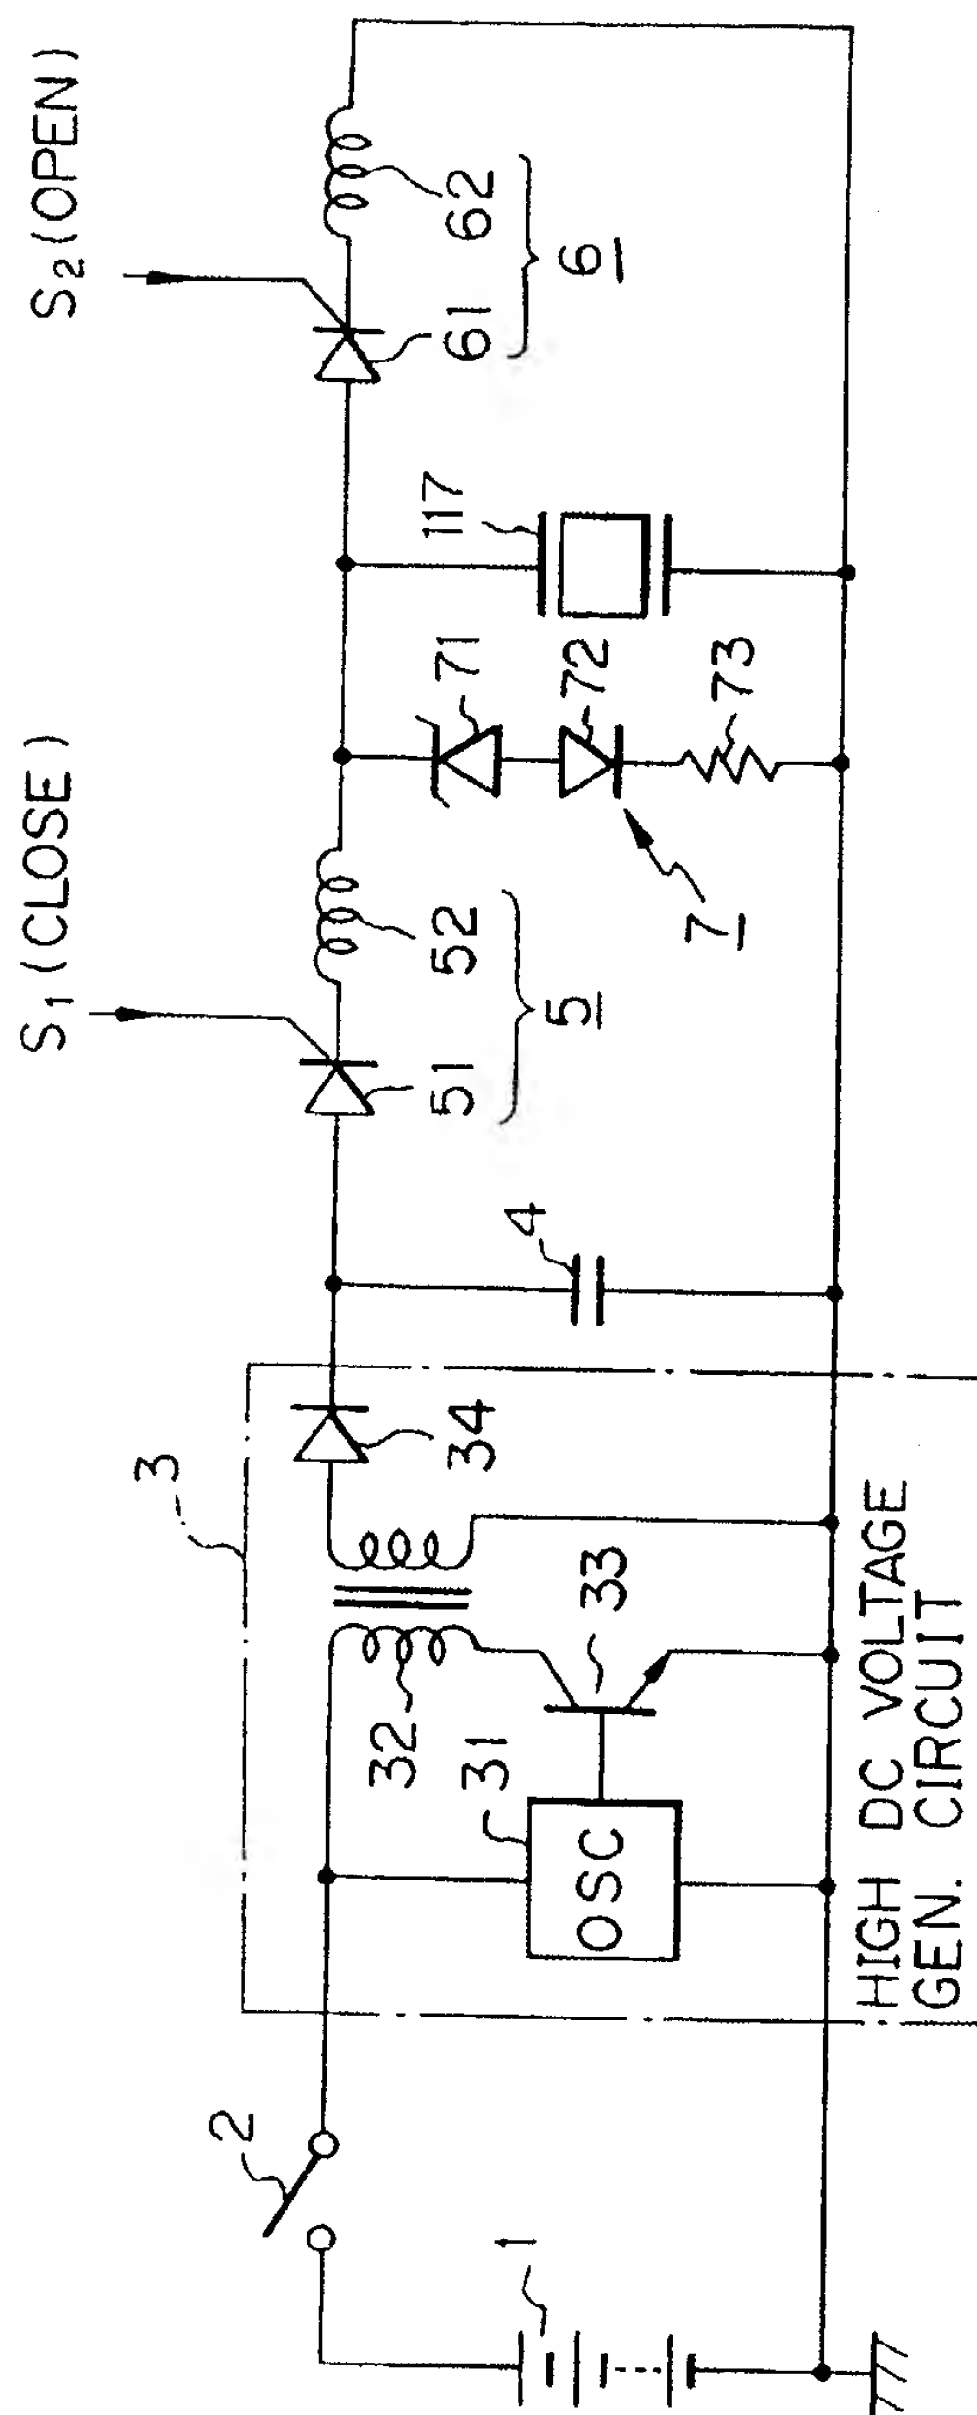


Fig. 6B

Fig. 7



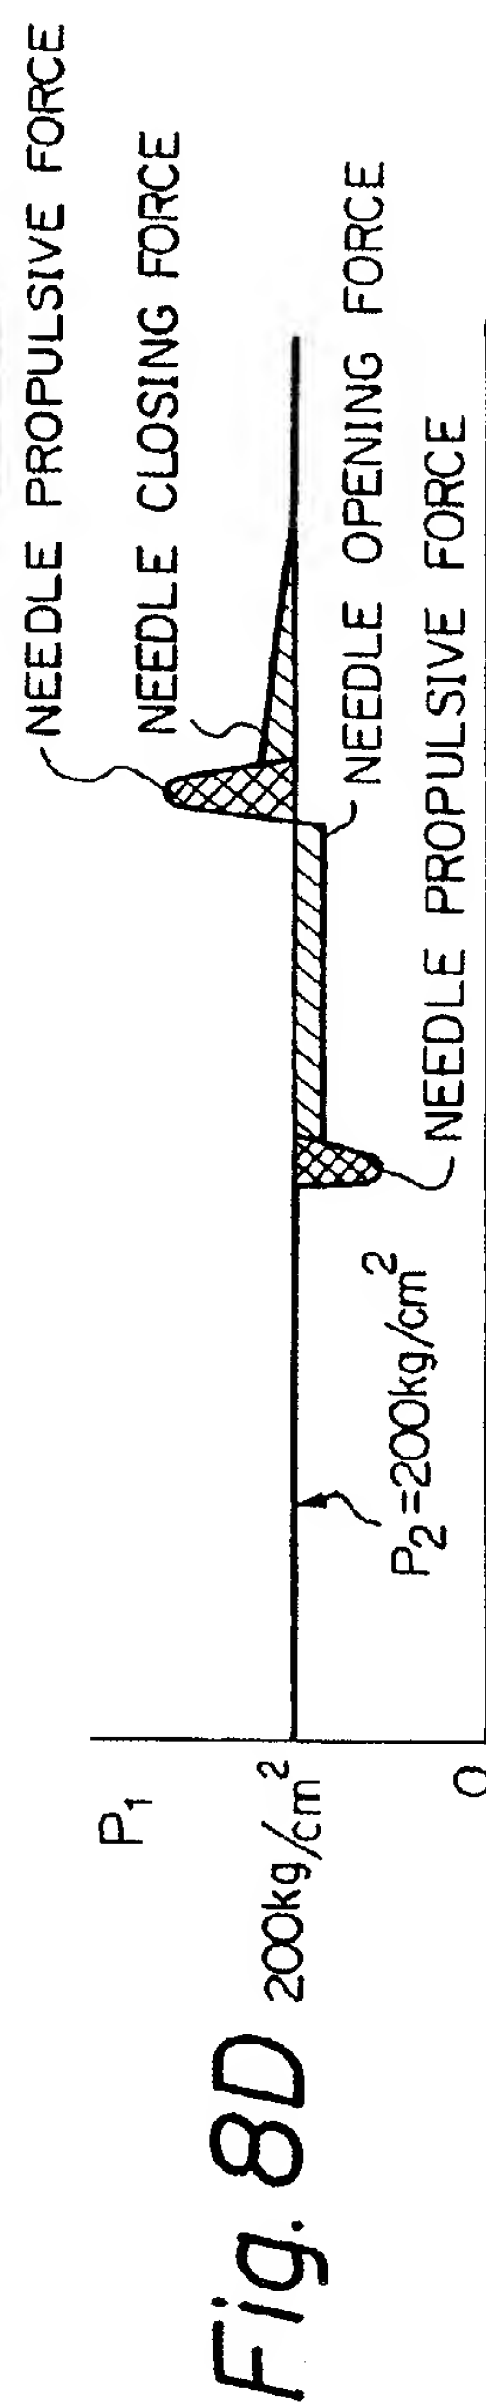
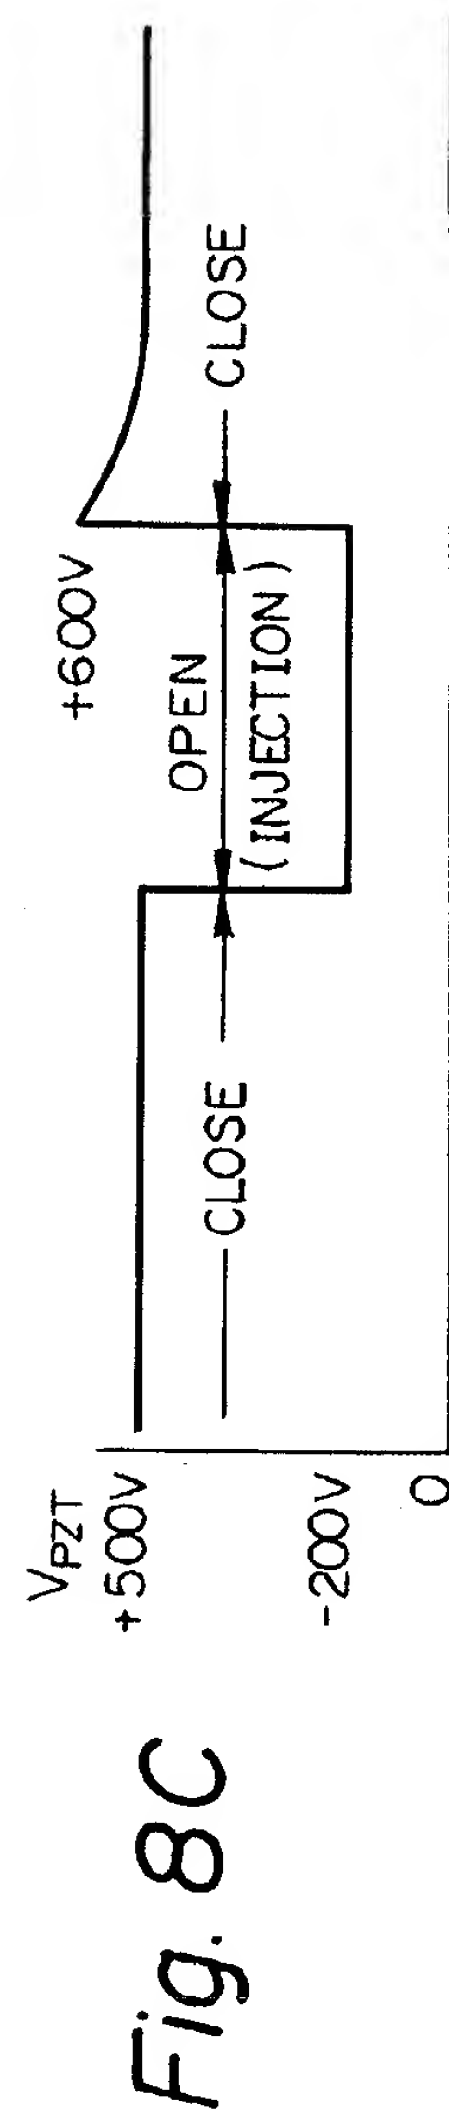
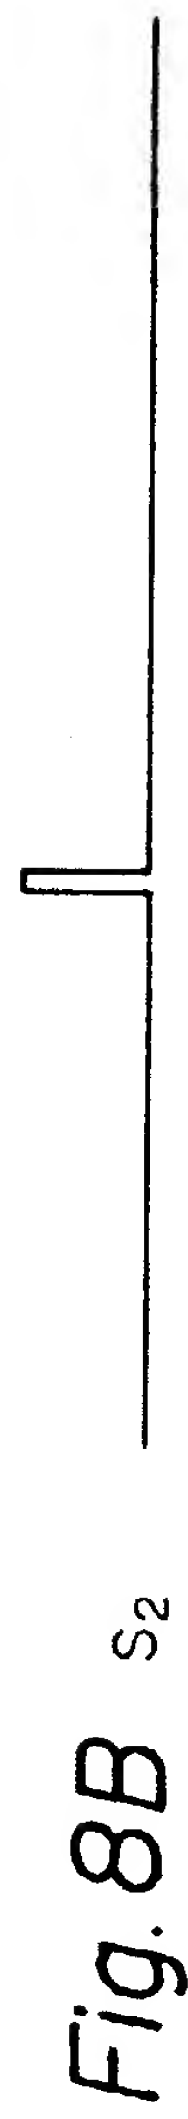
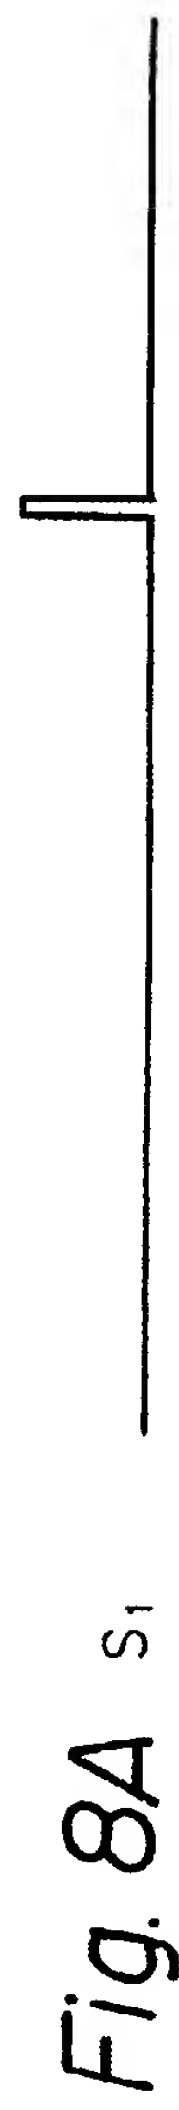


Fig. 9A Fig. 9B Fig. 9C

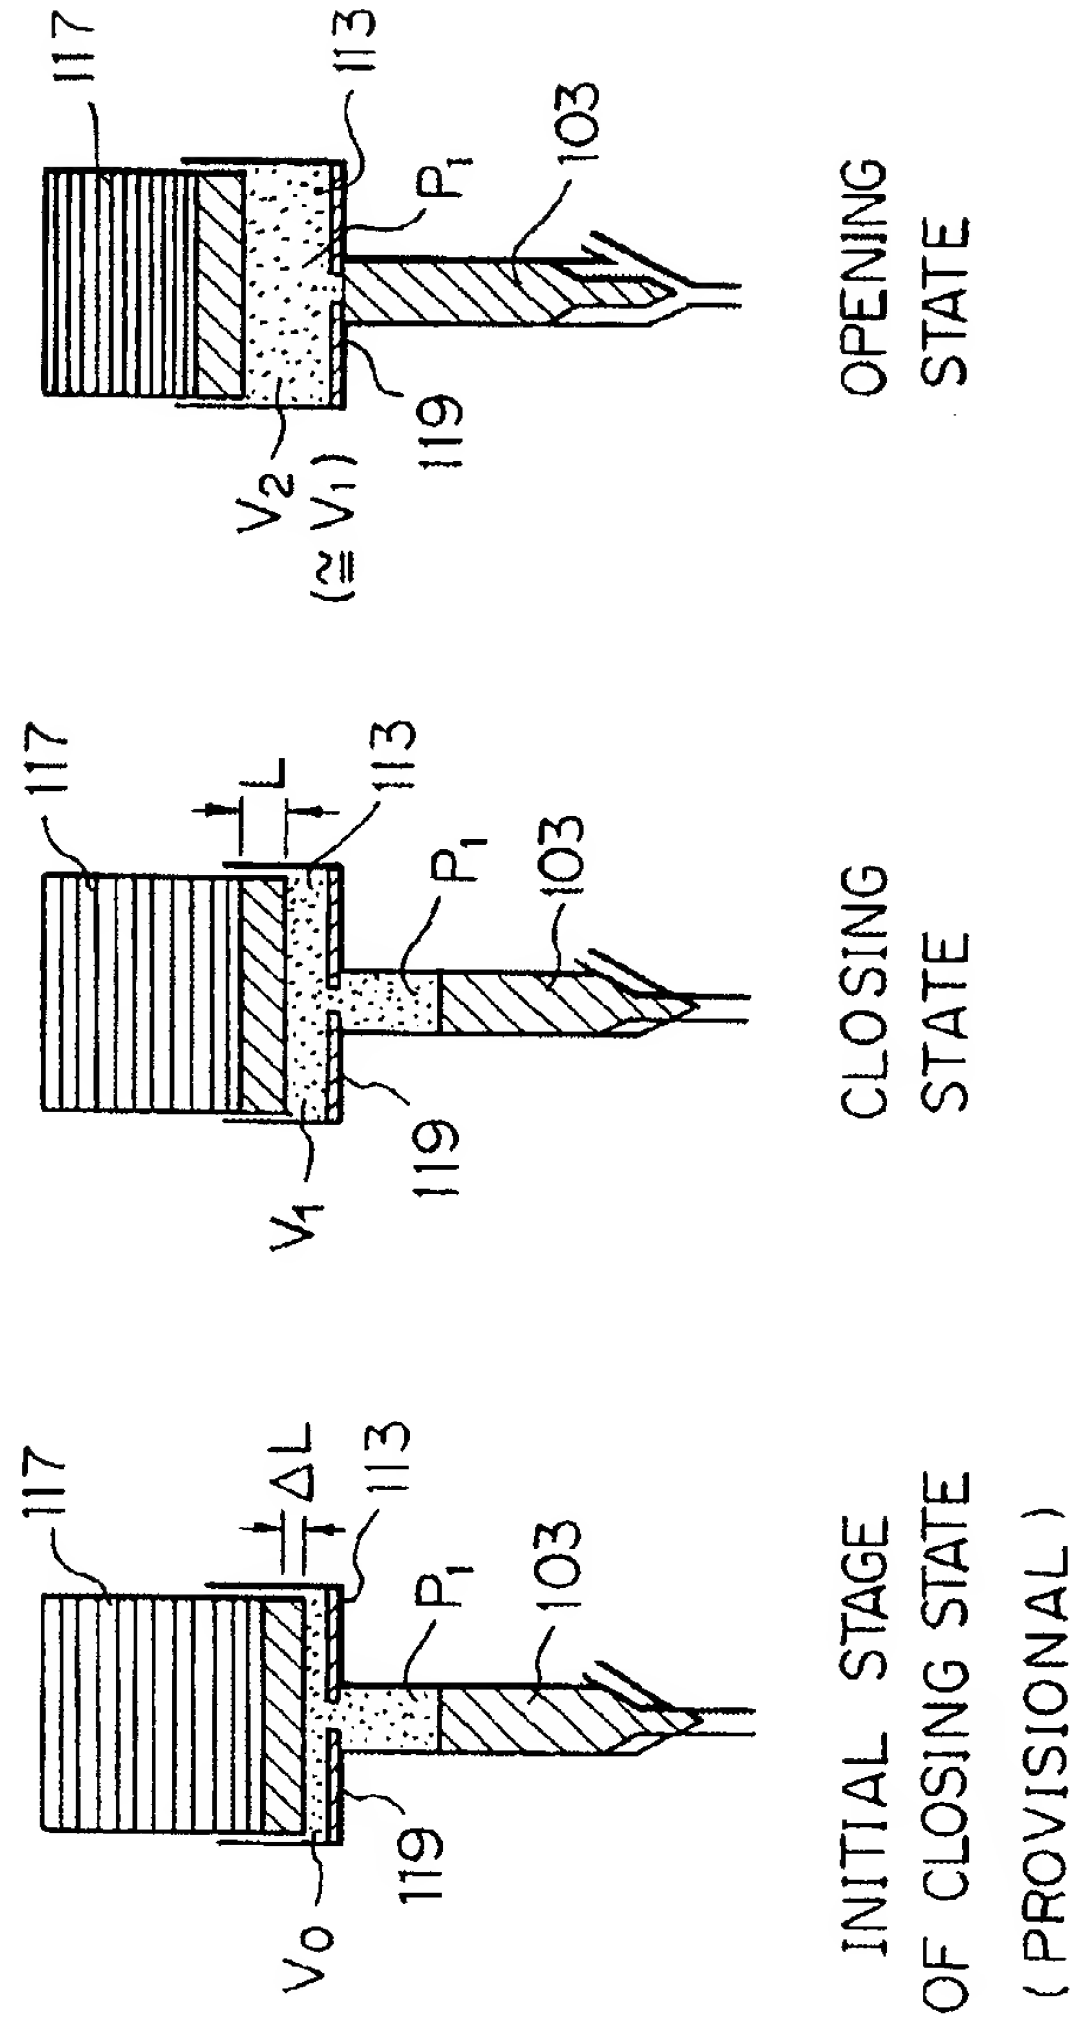


Fig. 10

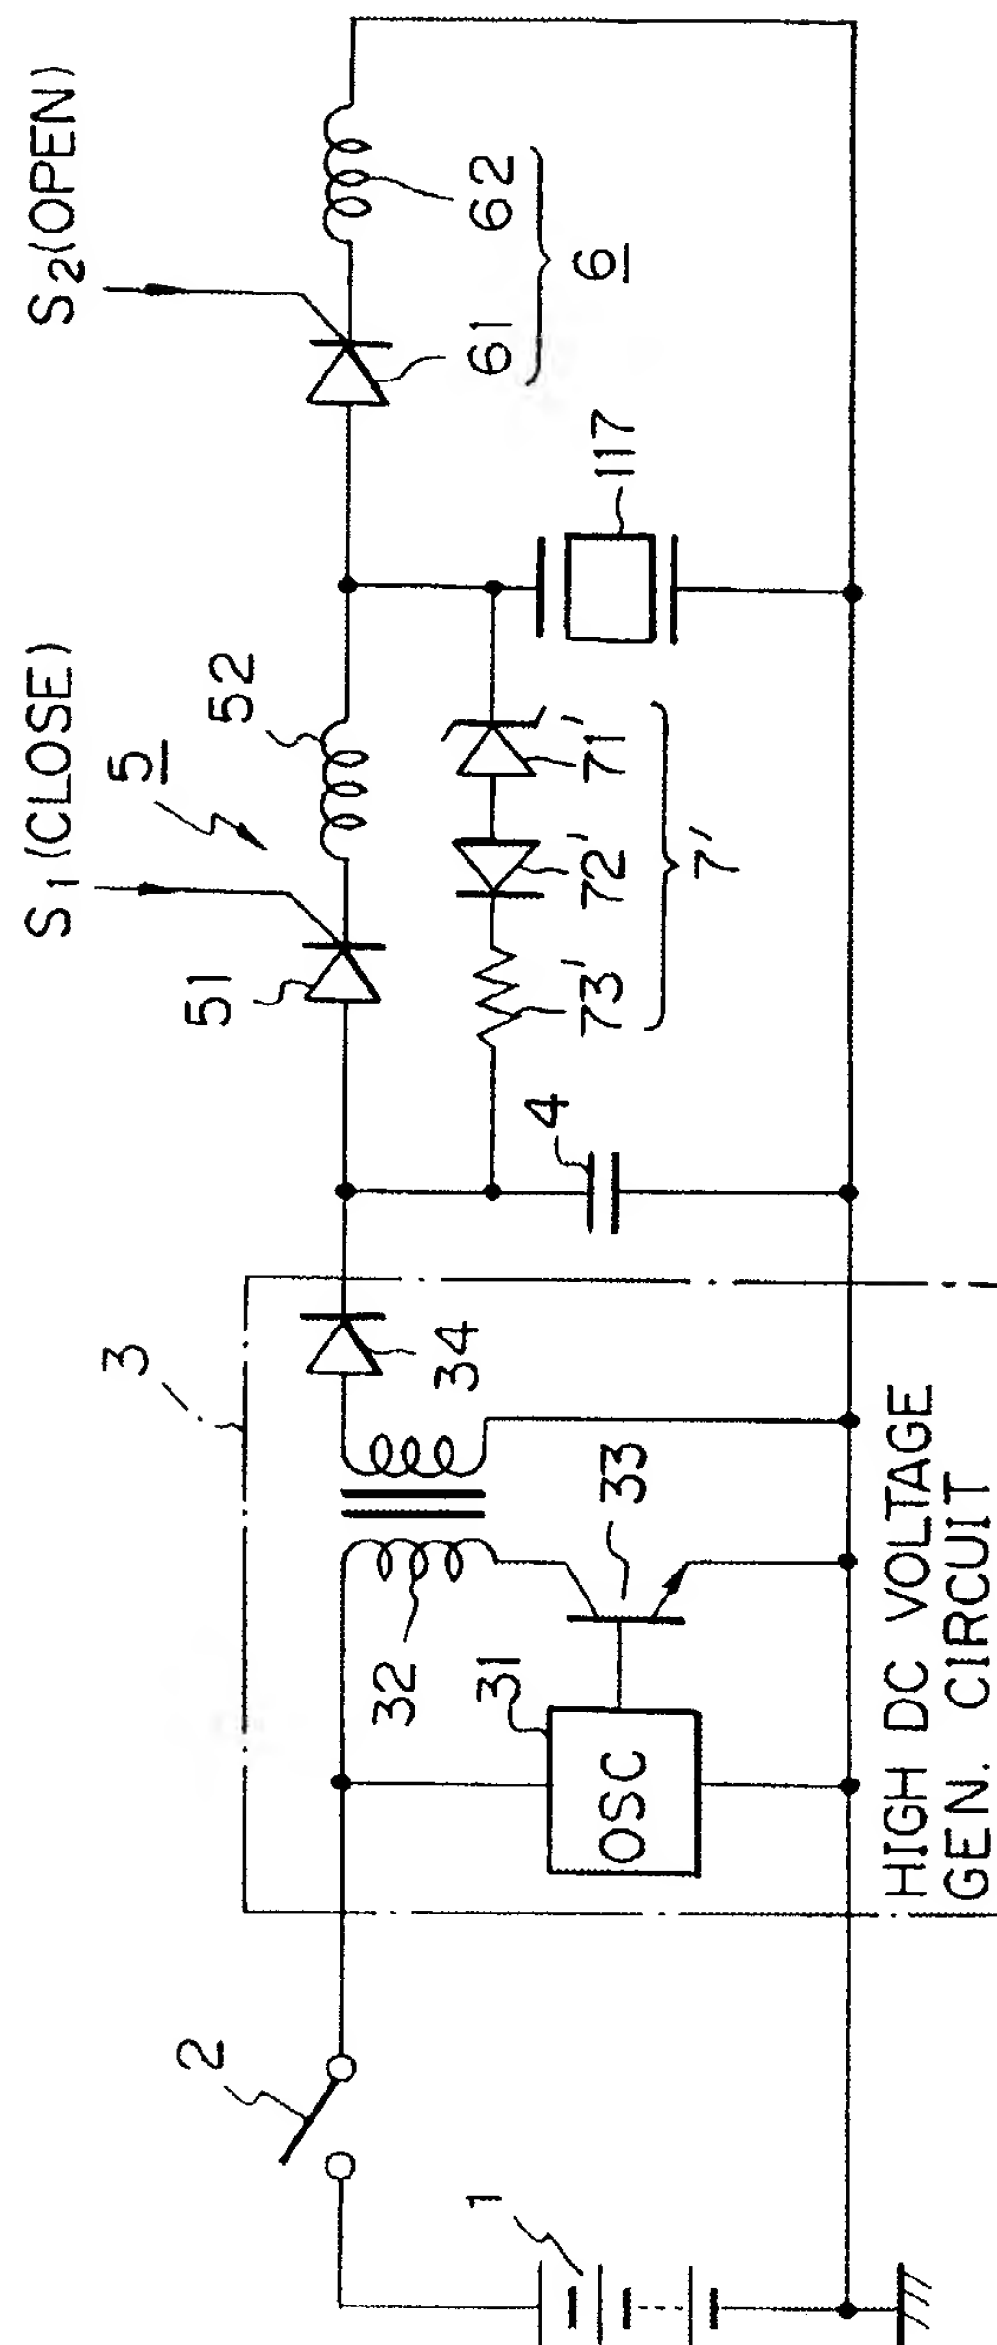


Fig. 11

